

# FW 3.46.0 LTP-X. Quick Configuration Manual

LTP-8X, LTP-4X optical line terminals

Application to the user manual  
LTP-X Quick Configuration Manual

Firmware version 3.46.0

- 1 [Annotation](#)
- 2 [Safety rules and installation procedure](#)
  - 2.1 [Safety requirements](#)
  - 2.2 [Terminal installation](#)
    - 2.2.1 [Support brackets mounting](#)
    - 2.2.2 [Terminal rack installation](#)
    - 2.2.3 [Power module installation](#)
    - 2.2.4 [Connecting to power supply](#)
- 3 [Connecting to the Command Line Interface \(CLI\)](#)
  - 3.1 [Connecting via Telnet/SSH](#)
  - 3.2 [Connecting via serial port](#)
  - 3.3 [Changing the user password](#)
- 4 [LTP-X network parameters configuration](#)
- 5 [OLT LTP-X firmware update](#)
- 6 [SNMP, SYSLOG, NTP, IP Source GUARD services configuration](#)
  - 6.1 [SNMP configuration](#)
  - 6.2 [SYSLOG configuration](#)
  - 6.3 [NTP configuration](#)
  - 6.4 [IP Source Guard configuration](#)
  - 6.5 [DHCP RA \(broadcast — unicast relay\) configuration](#)
- 7 [SWITCH configuration](#)
- 8 [IGMP configuration](#)
- 9 [CROSS\\_CONNECT, PORTS profiles configuration for ONT](#)
- 10 [PPPoE Intermedia Agent, DHCP Relay Agent — OLT profiles configuration](#)
  - 10.1 [PPPoE Intermedia Agent configuration](#)
  - 10.2 [DHCP Relay Agent configuration](#)
- 11 [Adding and configuring ONT](#)
- 12 [ONT configuration template](#)
- 13 [Configuration of LTP for operation with the internal ACS server](#)
- 14 [Configuration of ACS profile for ONT](#)
- 15 [Adding and configuring a subscriber via ACS](#)
- 16 [ONT firmware update via ACS](#)
- 17 [Appendix A. Example of ACS profile for NTP-RG14XXG-W/NTU-RG14XXG-W](#)
- 18 [APPENDIX B. Example of setting private parameters for NTP-RG14XXG/NTP-RG14XXG-W](#)
- 19 [APPENDIX C. RS-232 NULL-MODEM CABLE PIN DESIGNATION](#)
- 20 [Appendix D. ONT NTU-1 configuration](#)
- 21 [APPENDIX E. ONT SFP-ONU configuration](#)
- 22 [APPENDIX F. ONT/GPON interface status table](#)

## Notes and warnings



Notes contain important information, tips or recommendations on device operation and configuration.



Warnings are used to inform the user about situations that may cause harm to a software and hardware complex, lead to malfunction or data loss.

## Annotation

This manual specifies the following:

Safety rules and Installation procedure:

- Connection to the OLT LTP-X (hereinafter – the device) command line interface;
- OLT network parameters configuration;
- VLAN configuration to provide different services on switch;
- IGMP configuration on switch;
- Creation and modification of ONT profiles: Cross-connect, Ports, Management;
- Creation and modification of OLT profiles: pppoe-ia, dhcp-ra;
- Addition of ONT subscriber devices.

The following scheme is given as an example, figure 1:

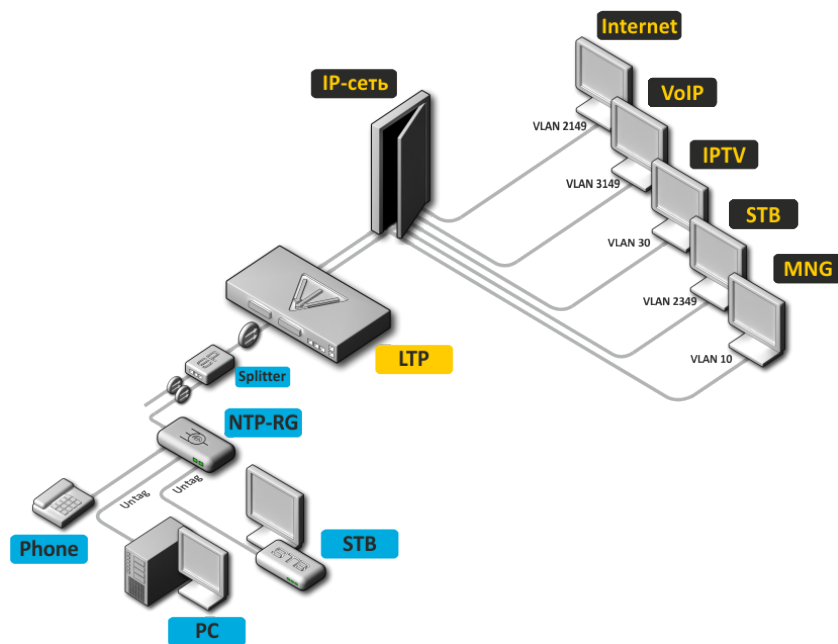


Figure 1 — Example of network configuration

Service type	VLAN used
Internet	2149
VoIP	3149
IPTV (multicast)	30
STB	2349
MNG-ONT (acs)	4094
MNG OLT	4000

It is required any PC application with support for Telnet or SSH protocol operation or direct connection via the console port (e.g. HyperTerminal).

## Safety rules and installation procedure

### Safety requirements

#### General requirements

Any operations with the terminal should comply to the "Safety Regulations for Operation of Consumer's Electrical Installations".



Operations with the terminal should be carried out only by personnel authorised in accordance with the safety requirements.

1. Before operating the device, all engineers should undergo special training.
2. The terminal should be connected only to properly functioning supplementary equipment.
3. The device could be permanently used provided the following requirements are met:
  - ambient temperature from -5 to +40 °C;
  - relative humidity up to 80 % at +25 °C;
  - atmosphere pressure from  $6,0 \times 10^4$  to  $10,7 \times 10^4$  Pa (from 450 to 800 mm Hg).
4. Do not expose the terminal to mechanical shocks and vibrations, as well as smoke, dust, water, and chemicals.
5. To avoid components overheating which may result in device malfunction, do not block air vents or place objects on the equipment.

#### Electrical safety requirements

1. Prior to connecting the device to a power source, ensure that the equipment case is grounded with an earth bonding point. The earthing wire should be securely connected to the earth bonding point. The resistance between the earth bonding point and earthing busbar should be less than 0.1 .
2. PC and measurement instruments should be grounded prior to connection to the terminal. The potential difference between the equipment case and the cases of the instruments should be less than 1V.

3. Prior to turning the device on, ensure that all cables are undamaged and securely connected.
4. Make sure the device is off, when installing or removing the case.
5. Replacement of power modules is carried out:
  - for LTP-X rev.B only when the power is off;
  - for LTP-X rev.C/rev.D without turning off the power.
6. SFP transceivers can be installed or removed without turning off the power.

## Terminal installation

Check the device for visible mechanical damage before installing and turning it on. In case of any damage, stop the installation, fill in a corresponding document and contact your supplier. If the terminal was exposed to low temperatures for a long time before installation, leave it for 2 hours at ambient temperature prior to operation. If the device was exposed to high humidity for a long time, leave it for at least 12 hours in normal conditions prior to turning it on.

## Support brackets mounting

The delivery package includes support brackets for rack installation and mounting screws to fix the terminal case on the brackets. To install the support brackets:

- **Step 1.** Align four mounting holes in the support bracket with the corresponding holes in the side panel of the device.
- **Step 2.** Use a screwdriver to screw the support bracket to the case.
- **Step 3.** Repeat steps 1 and 2 for the second support bracket.

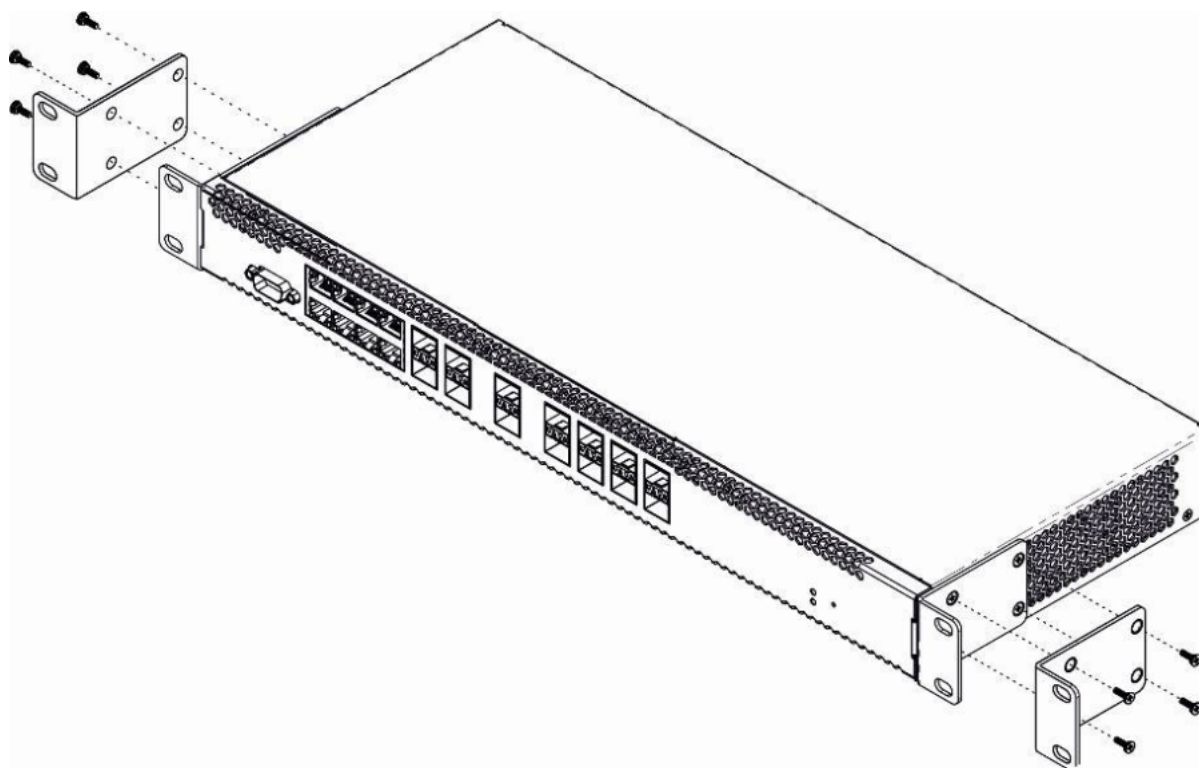


Figure 2 — Support brackets mounting

## Terminal rack installation

To install the terminal into the rack:

- **Step 1.** Attach the terminal to the vertical guides of the rack.
- **Step 2.** Align mounting holes in the support bracket with the corresponding holes in the rack guides. Use the holes of the same level on both sides of the guides to ensure the device horizontal installation.
- **Step 3.** Use a screwdriver to screw the terminal to the rack.

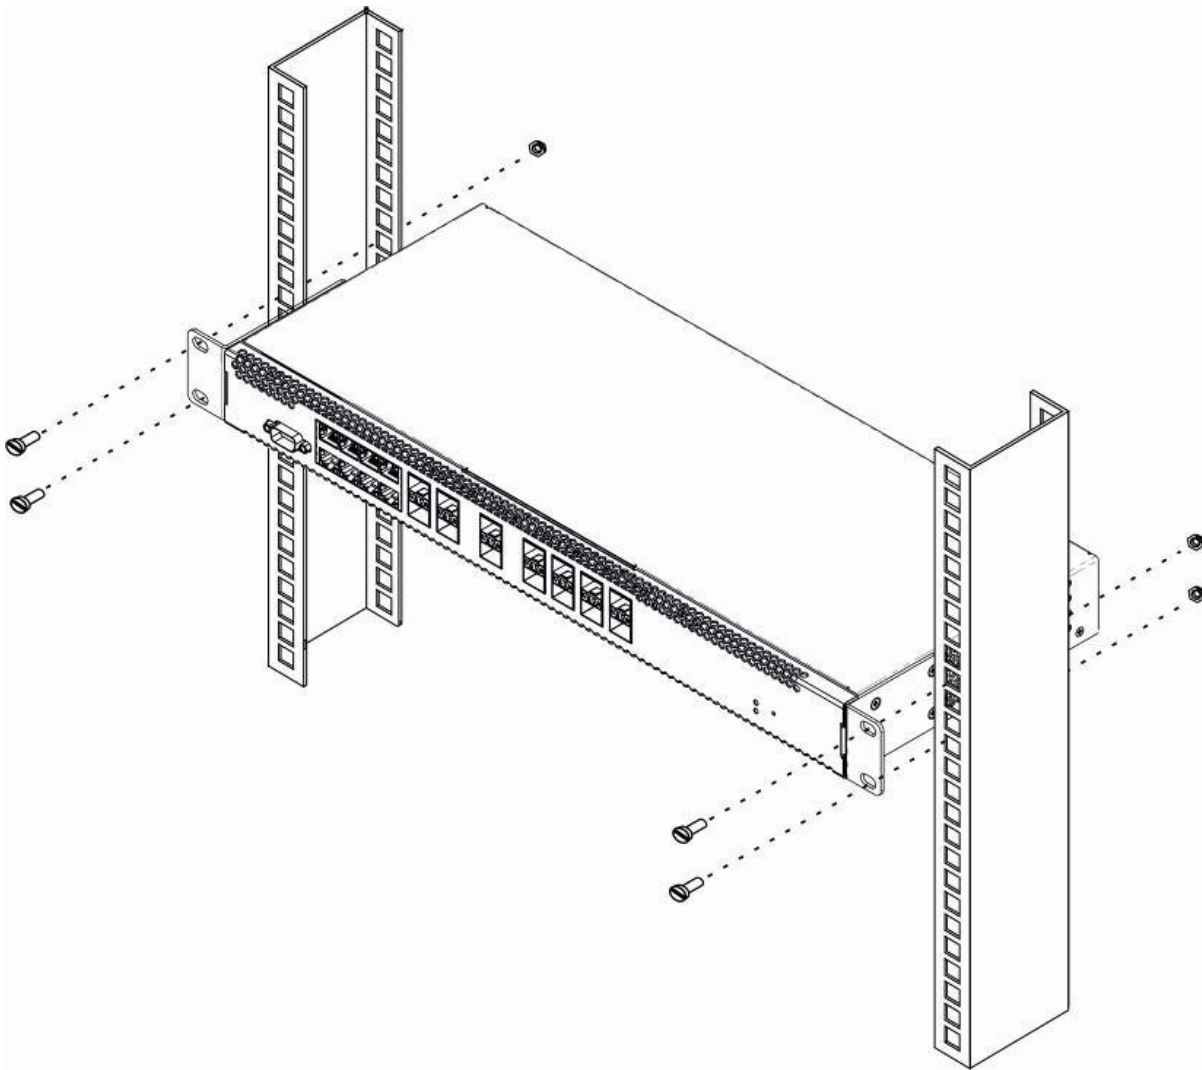


Figure 3 — Device rack installation

The terminal is horizontally ventilated. The side panels have air vents. Do not block the air vents to avoid components overheating and subsequent terminal malfunction.



To avoid overheating and provide necessary ventilation of the terminal, sufficient space should be provided above and below the terminal, not less than 10 cm.

## Power module installation

Depending on power supply requirements, terminals can be supplemented with either an AC power module, 220 V, 50 Hz, or a DC power supply module, 48 V. The installation location for the power module for LTP-X rev.B is shown in figure 4.

The installation location for the power module for LTP-X rev.C/rev.D is shown in figure 5.

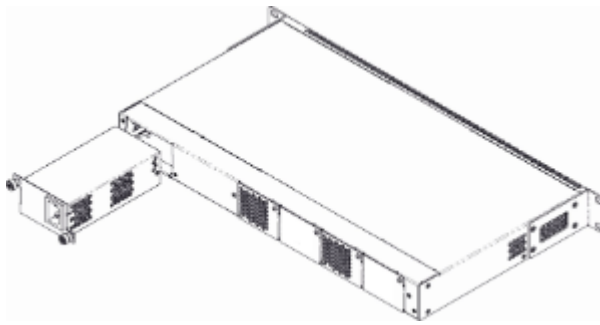


Figure 4 — Power module installation for LTP-X rev.B

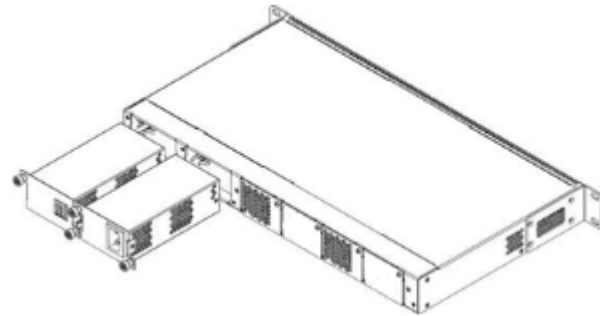


Figure 5 — Power module installation for LTP-X rev.C/rev.D

To install a power module:

- **Step 1.** Install the power module into the socket shown in figure above;
- **Step 2.** Screw the power module to the case;
- **Step 3.** Turn the power on.

## Connecting to power supply

- **Step 1.** Mount the device. In case of installation to a 19" form-factor rack, mount the support brackets from the delivery package to the rack.
- **Step 2.** Ground the case of the device. This should be done prior to connecting the device to the power supply. An insulated multiconductor wire should be used for earthing. The device grounding and the earthing wire section should comply with Electric Installation Code. The earth bonding point is located at the right bottom corner of the rear panel.
- **Step 3.** If you intend to connect a PC or another device to the switch console port, the device must be properly grounded as well.
- **Step 4.** Connect the power supply cable to the device.
- **Step 5.** Turn the device on and check the front panel LEDs to make sure the terminal is in normal operating conditions.

## Connecting to the Command Line Interface (CLI)

### Connecting via Telnet/SSH

Connect the network data cable to one of the 'GE Port' or 'Combo GE' of LTP-X. The following factory settings are used for SSH/Telnet connection:

- **Default IP:** 192.168.1.2
- **Default mask:** 255.255.255.0
- **Default GW:** 0.0.0.0
- **Login:** admin
- **Password:** password

```
login:admin
Password: password
```



For security reasons, it is recommended to change the factory password when connecting for the first time (see Section [Changing the user password](#)).

If the device does not connect with the factory IP address, connect to it via the COM port using the terminal program and check the network settings (see [Connecting via serial port](#)).

## Connecting via serial port

A null modem cable is used for connection. The null modem cable pin designation is given in [Appendix . RS-232 null-modem cable pin designation](#).

To connect via the serial port, the following settings must be set:

- **Speed: 115200 bit/s**
- **Data bits: 8 bits**
- **Parity: no**
- **Stop bits: 1**
- **Flow control: none**
- **Login: admin**
- **Password: password**



For security reasons, it is recommended to change the factory password when connecting for the first time (see Section [Changing the user password](#)).

Check the network settings with the **show management** command.

```
Check the network settings
LTP-X# show management
  Network:
    Hostname:                'LTP-X'
    Ipaddr:                  192.168.1.2
    Netmask:                 255.255.255.0
    Vlan management:         1
    Gateway:                 0.0.0.0
    Vlan prio:               7
    Dscp:                    63
```

## Changing the user password

```
Go to the configuration mode
LTP-X# configure terminal

Show created users
LTP-X(config)# do show users config

Set the new password for admin
LTP-X(config)# user admin password XXXX

Set the new password for root
LTP-X(config)# user root password XXXX

Apply the configuration
LTP-X(config)# do commit

Save the configuration
LTP-X(config)# do save
```

## LTP-X network parameters configuration

For remote management of LTP-X, you should set network parameters of the device according to the settings of the network that you intend to use. Changing the network parameters of the device is recommended when connecting to the CLI via a serial interface.

```
Go to the configuration mode
LTP-X# configure terminal
```

Set the required network settings, e.g. IP=192.168.205.105, Mask=255.255.255.0, Gateway=192.168.205.230, VLAN=4000.

```
LTP-X(config)# management ip 192.168.205.105
LTP-X(config)# management mask 255.255.255.0
LTP-X(config)# management gateway 192.168.205.230
LTP-X(config)# management vid 4000
LTP-X(config)# exit
```

Check the network settings

```
LTP-X# show management
```

```
Network:
  Hostname:                'LTP-X'
  Ipaddr:                  192.168.205.105
  Netmask:                 255.255.255.0
  Vlan management:        4000
  Gateway:                 192.168.205.230
  Vlan prio:               7
  Dscp:                   63
  Additional vlan:         <list is empty>
```

The new network settings will be applied after applying/saving the configuration with the commit, save commands without rebooting the device:

Apply the configuration

```
LTP-X# commit
```

Save the configuration

```
LTP-X# save
```

If VLAN will be used for control (in this example, VID=4000), you should add it to the SWITCH configuration:

Go to the SWITCH mode

```
LTP-X# switch
```

SWITCH configuration mode

```
LTP-X(switch)# configure terminal
```

Add the required VLAN

```
LTP-X(switch)(config)# vlan 4000
```

Receive the traffic in VLAN from front-port 0

```
LTP-X(switch)(config-vlan)# tagged front-port 0
```

```
LTP-X(switch)(config-vlan)# exit
```

Apply the configuration

```
LTP-X(switch)(config)# commit
```

```
LTP-X(switch)(config)# exit
```

```
LTP-X(switch)# exit
```

Save the configuration

```
LTP-X# save
```

## OLT LTP-X firmware update

For proper operation of LTP-X, it is recommended to update the firmware. The actual firmware version can be checked in the vendor's technical support section.

Upload the firmware file to the TFTP server (as an example, firmware version 3.40.0-build2358).

Next, download this file to LTP-X using the following command.

```

Specify firmware file name and TFTP server address
LTP-8X# copy tftp://192.168.205.250/ltip-8x-revc-revd-3.40.0-build2358.fw.bin
fs://firmware
  Check free memory...ok
  Downloading system firmware..
  .....
  .....
  .....
System firmware successfully downloaded
Updating system firmware..
  Current board version:      6
  Current firmware version:  3.38.2.16
  New firmware version:      3.40.0.2358
Update device mtd7
  Erase flash...
  Done.
  Write data...
  Done.
  Done.
Success
Update device mtd8
  Erase flash...
  Done.
  Write data...
  Done.
  Done.
Success
Update device mtd5
  Erase flash...
  Done.
  Write data...
  Done.
  Done.
Success
Update device mtd6
  Erase flash...
  Done.
  Write data...
  Done.
  Done.
Success
System firmware successfully updated

LTP-8X#

```

Reboot the device using the **reboot** command.

```

Reboot device
LTP-X# reboot
  Do you really want to reboot the system now? (y/n)  y

```

After LTP-8X loading, the firmware version can be found by the **show version** command.

```

LTP-8X# show version
Eltex LTP-8X:rev.C software version 3.40.0 build 2358 on 10.12.2018 15:32

```

## SNMP, SYSLOG, NTP, IP Source GUARD services configuration

### SNMP configuration

SNMP is a protocol designed for monitoring and managing network devices.



```

Go to the configuration mode
LTP-X# configure terminal

Enable SNMP
LTP-X(config)# ip snmp enable

Specify version v2 and EMS server address
LTP-X(config)# ip snmp traps 192.168.205.200 type v2

Check SNMP parameters
LTP-X(config)# do show ip snmp
  Snmp:
    Enabled: true
    Access control: false
    Allow ip: <list is empty>
    Traps [0]:
      Type: v2
      Ipaddr: 192.168.205.200
    Version: v2
    Community read-only [0]: 'QwYva0dvS3N'
    Community read-only [1]: 'QwYva0dvS3N'
    Community read-only [2]: 'QwYva0dvS3N'
    Community read-write [0]: 'LQtfx9v3m9+qA=='
    Community read-write [1]: 'LQtfx9v3m9+qA=='
    Community read-write [2]: 'LQtfx9v3m9+qA=='
    Trap community: '9qXUEDwUMAg'
    Location: 'unknown'
    Contact: 'admin'
    Alias: <for showing use>
separate command>
  EngineID: 0xEF20CAF8234E12401216B17D85
  Users: <for showing use separate command>

Apply the configuration
LTP-X(config)# do commit

Save the configuration
LTP-X(config)# do save

```

## SYSLOG configuration

Syslog is a protocol designed for sending system event messages and error notifications to remote servers.

```

Go to the configuration mode
LTP-X# configure terminal

Specify syslog server address *
LTP-X(config)# logging remote 192.168.205.200

Check syslog settings
LTP-X(config)# do show logging
  Log:
    Remote syslog:          192.168.205.200
    Port:                   514
    Size:                   16384
    Origin-id:
      Type:                  ip
    Save logs between boots: false
    Log input commands:     false
    Destinations:
      System:                notice
      Console:               critical
      Remote shells:         critical
      File:                  notice

Apply the configuration
LTP-X(config)# do commit

Save the configuration
LTP-X(config)# do save
* - up to 4 servers can be specified at the same time.

```

## NTP configuration

NTP is a protocol designed for time synchronization between the network device and the server.

```

Go to the configuration mode
LTP-X# configure terminal

Enable NTP service
LTP-X(config)# ip ntp enable

Specify NTP server address
LTP-X(config)# ip ntp ip 192.168.205.200

Specify timezone
LTP-X(config)# ip ntp timezone 7

```

```

Check NTP settings
LTP-X(config)# do show ip ntp
  Ntp:
    Enabled:                true
    Ntpserver:               192.168.205.200
    Interval:                3600
    Timezone:                7
    Daylightsaving:         false

Apply the configuration
LTP-X(config)# do commit

Save the configuration
LTP-X(config)# do save

```

## IP Source Guard configuration

Starting from version 3.26.0, OLT supports the IP Source Guard functionality, which allows you to limit the unauthorized use of IP addresses on the network. The verification is carried out by binding the IP address to the source MAC address for a specific service on a specific ONT.

```
Go to the configuration mode
LTP-X# configure terminal

Enable Source Guard service
LTP-X(config)# ip source-guard enable

Set the mode
LTP-X(config)# ip source-guard mode dynamic
```

To add static bindings, use the following command:

**LTP-X(config)# ip source-guard bind ip <IP> mac <MAC> interface-ont <ONT> service <NUM>**

Where:

- **IP**— IP address of client equipment in X.X.X.X format;
- **MAC**— client equipment MAC address in format of .....;
- **ONT**— ONT identifier in format of /Y (Channel ID/ONT ID);
- **NUM**— ONT service number, through which traffic with specific addresses will be transmitted.

## DHCP RA (broadcast — unicast relay) configuration

To reduce the broadcast traffic and avoid responses from illegal DHCP servers, unicast messages can be configured to interact with the specified DHCP Relay Agent. Relay Agent can be individually started for each separate VLAN. The service allows processing only for the packets, which have only one 802.1q tag.

1. Create an L3 interface by specifying the IP address of the VLAN the service is provided for. If the address of the DHCP server is in the same network as the management interface, skip Step 3. If the DHCP server is in the VLAN, which is specified in cross-connect, the IP address of the interface being created should be in the same network as the DHCP server, and you should skip Step 3.

```
Add VLAN
LTP-X(switch)(config)# vlan 2000

Set IP address for VLAN 2000
LTP-X(switch)(config-vlan)# ip address 10.10.10.1/32
```

2. Specify DHCP server address.

```
Specify DHCP server IP address
LTP-X(switch)(config-vlan)# ip dhcp relay 192.168.56.1
```

3. Create an L3 interface by specifying the IP address of the VLAN, which is used for switching in the network where the DHCP server is located.

```
Add VLAN
LTP-X(switch)(config)# vlan 1209
LTP-X(switch)(config-vlan)# ip address 192.168.209.240/24
```

4. If the address of the DHCP server is located after the router available after the specified L3 interface, configure a static route.

```
LTP-X(config)# ip route prefix 192.168.56.0 mask 24 gateway 192.168.209.5
LTP-X(switch)(config-vlan)# ip address 192.168.209.240/24
```

## SWITCH configuration

```

Go to the SWITCH mode
LTP-X# switch

SWITCH configuration
mode
LTP-X(switch)# configure

Add all required VLANs
LTP-X(switch)(config)# vlan 2149,2349,30,3149,4094

Transmit tagged to all pon ports*
LTP-X(switch)(config-vlan-range)# tagged pon-port 0 - 7

Receive the traffic in VLAN from front-port 0
LTP-X(switch)(config-vlan-range)# tagged front-port 0

Go to the configuration mode
LTP-X(switch)(config-vlan-range)# exit

Apply the configuration
LTP-X(switch)(config)# commit
LTP-X(switch)(config)# exit
LTP-X(switch)# exit

Save the configuration
LTP-X# save

```

*\* The command is applicable for:*  
LTP-8 rev.B with HW\_revision 2v.  
LTP-8 rev./rev.D with HW\_revision 1v.  
For LTP-4X rev.B/LTP-4X rev.C/rev.D, the **tagged pon-port 0 – 3** command is applied.

The hardware version of LTP-X can be found using the following command.

```

LTP-8X# show system environment
System information:
  CPU load average (1m, 5m, 15m):  0.83  2.35  1.48
  Free RAM/Total RAM (Mbytes):      279/495
  Temperature (sensor1/sensor2):     35C/48C
  Reset button:                      enabled

  Fan configured speed, %:           auto
  Fan minimum speed, %:              15
  Fan speed levels, %:               16 27 39 51 64 76 88 100
  Fan state (fan0/fan1):              6300rpm 6450rpm
  PLD FW version:                    14

  TYPE:                              LTP-8X-rev.C
  HW_revision:                       1v1
  SN:                                GP2B000024
  MAC:                                A8:F9:4B:8B:50:00

Power supply information:
Module 1: PM150 220/12 1vX
  Type: Alternate current(AC)
  Intact: 1
Module 2: PM150 220/12 1vX
  Type: Alternate current(AC)
  Intact: 1

```



If you do not save the settings, after restarting, the device will return to the last saved configuration.

## IGMP configuration

```

Enable IGMP SNOOPING globally
LTP-X(switch)(config)# ip igmp snooping

VLAN 30 configuration
mode

LTP-X(switch)(config)# vlan 30

Enable IGMP SNOOPING in VLAN
multicast

LTP-X(switch)(config-vlan)# ip igmp snooping enable

Enable IGMP
proxying
LTP-X(switch)(config-vlan)# ip igmp snooping querier enable

Enable IGMP-report proxying
LTP-X(switch)(config-vlan)# exit
LTP-X(switch)(config)# ip igmp proxy report enable

Specify IGMP address range for proxying from unicast to multicast
VLANs
LTP-X(switch)(config)# ip igmp proxy report range 224.0.0.1 239.255.255.255 from 2349 to 30

Apply the configuration
LTP-X(switch)(config)#
commit

LTP-X(switch)(config)# exit
LTP-X(switch)# exit

Save the configuration
LTP-X#
save

```

## CROSS\_CONNECT, PORTS profiles configuration for ONT

```

Go to the configuration mode
LTP-X# configure terminal

Select datapath model
2

LTP-X(config)# gpon olt model 2

Create and switch to a Cross-Connect profile for the ONT Internet
service

LTP-X(config)# profile cross-connect
INTERNET

LTP-X(config-cross-connect)("INTERNET")#

Specify the service VLAN of the Internet service
LTP-X(config-cross-connect)("INTERNET")# outer vid 2149

Specify inner VLAN of Internet service on
ONT
LTP-X(config-cross-connect)("INTERNET")# user vid
10
LTP-X(config-cross-connect)("INTERNET")# exit

Create and switch to a Cross-Connect profile for the ONT SIP VoIP service
LTP-X(config)# profile cross-connect VOIP

```

Specify the service VLAN of the VoIP service

```
LTP-X(config-cross-connect)("VOIP")# outer vid 3149
```

Specify inner VLAN of VoIP service on ONT

```
LTP-X(config-cross-connect)("VOIP")# user vid 12
LTP-X(config-cross-connect)("VOIP")# exit
```

Create and switch to a Cross-Connect profile for the multicast service

```
LTP-X(config)# profile cross-connect MC_IPTV
```

Specify the service VLAN of the multicast service

```
LTP-X(config-cross-connect)(" MC_IPTV ")# outer vid 30
```

Specify inner VLAN of multicast service on ONT

```
LTP-X(config-cross-connect)(" MC_IPTV ")# user vid 30
```

Specify multicast service

```
type
LTP-X(config-cross-connect)(" MC_IPTV ")# type multicast
LTP-X(config-cross-connect)(" MC_IPTV ")# exit
```

Create and switch to a Cross-Connect profile for the ONT UC\_IPTV service

```
LTP-X(config)# profile cross-connect UC_IPTV
```

Specify the service VLAN of the STB unicast service

```
LTP-X(config-cross-connect)(" UC_IPTV ")# outer vid 2349
```

Specify inner VLAN of STB unicast service on ONT

```
LTP-X(config-cross-connect)(" UC_IPTV ")# user vid 11
LTP-X(config-cross-connect)(" UC_IPTV ")# exit
```

Create and switch to a Cross-Connect profile for the ONT management service

```
LTP-X(config)# profile cross-connect ACS
```

Specify service VLAN for management service

```
LTP-X(config-cross-connect)("ACS")# outer vid 4094
```

Specify inner VLAN for management service in ONT

```
LTP-X(config-cross-connect)("ACS")# user vid untagged
```

Specify management service type

```
LTP-X(config-cross-connect)("ACS")# type management
LTP-X(config-cross-connect)("ACS")# exit
```

Create and switch to multicast profile

```
LTP-X(config)# profile ports NTP-RG
```

Enable IGMP Proxy on NTP VoIP interface

```
LTP-X(config-ports)("NTP-RG")# veip multicast
```

Configuration of IGMP traffic mapping in 30th VLAN

```
LTP-X(config-ports)("NTP-RG")# veip upstream vid 30
```

Configuration of multicast mapping in 30th VLAN

```
LTP-X(config-ports)(" NTP-RG ")# veip downstream vid 30
```

VLAN multicast configuration, in which the range of the following groups comes

```
LTP-X(config-ports)(" NTP-RG ")# igmp multicast dynamic-entry 0 vid 30
```

Configuration of the range of multicast groups

```
LTP-X(config-ports)(" NTP-RG ")# igmp multicast dynamic-entry 0 group 224.0.0.1 239.255.255.255
```

```
Apply the configuration
LTP-X(config-ports)(" NTP-RG ")# do commit

Save the configuration
LTP-X(config-ports)(" NTP-RG ")# do
save
```



If you do not save the settings, after restarting, the device will return to the last saved configuration.

## PPPoE Intermedia Agent, DHCP Relay Agent — OLT profiles configuration

### PPPoE Intermedia Agent configuration

```
Go to the configuration mode
LTP-X# configure terminal

Add and switch to profile
configuration
LTP-X(config)# profile pppoe-ia 1

Enable Agent
LTP-X(config-pppoe-ia)("1")# enable

Set the maximum number of PPPoE sessions for a profile
LTP-X(config-pppoe-ia)("1")# sessions-limit 8094

Set the maximum number of PPPoE sessions for a single ONT
LTP-X(config-pppoe-ia)("1")# sessions-limit per-user 4

Configure circuit_id format
LTP-X(config-pppoe-ia)("1")# format circuit-id %HOSTNAME%%ONTID%

Configure remote_id format
LTP-X(config-pppoe-ia)("1")# format remote-id %HOSTNAME%%ONTID%

Apply the configuration
LTP-X(config-pppoe-ia)("1")# do commit

Save the configuration
LTP-X(config-pppoe-ia)("1")# do save

Assign pppoe-ia 1 profile on OLT
LTP-X(config-pppoe-ia)("1")# exit
LTP-X(config)# gpon olt profile pppoe-ia 1

Apply the configuration
LTP-X(config)# do commit

Save the configuration
LTP-X(config)# do
save
```



If Auto reconfigure GPON port (Auto reconfigure GPON-port: true) is not set in OLT configuration, then OLT chips must be reconfigured to apply pppoe-ia profile settings.

Reconfiguration is performed by the following command.

```
LTP-X# reconfigure olt all
```

For LTP-4X:

```
LTP-X# reconfigure olt
```

## DHCP Relay Agent configuration



```

Go to the configuration mode
LTP-X# configure terminal

Add and switch to the DHCP profile configuration menu
LTP-X(config)# profile dhcp-ra 1

Enable Agent
LTP-X(config-dhcp-ra)("1")# enable

Send HOSTNAME LTP-X and id ONT in information about which port the request for DHCP relay came from
LTP-X(config-dhcp-ra)("1")# overwrite-option82 circuit-id %HOSTNAME%%ONTID%

Transmit the HOSTNAME LTP-X and id ONT in the identifier of the DHCP relay itself
LTP-X(config-dhcp-ra)("1")# overwrite-option82 remote-id %HOSTNAME%%ONTID%

Apply the configuration
LTP-X(config-dhcp-ra)("1")# do commit

Save the configuration
LTP-X(config-dhcp-ra)("1")# do save

Assign the required configuration profile globally
LTP-X(config)# gpon olt profile dhcp-ra 1

Assign profile 1 on VLAN 3149
LTP-X(config)# gpon olt profile dhcp-ra 1 vid 3149

Apply the configuration
LTP-X(config)# do commit

Save the configuration
LTP-X(config)# do save

View OLT configuration
LTP-X# show gpon olt configuration
    Block duplicated mac:                enabled
    Disable rogue ONT:                  disabled
    Ont block time:                      5
    Dhcp-ra shaper:                     100
    Profile pppoe-ia:                   1
    OLT Profile PPPoE Intermediate Agent 1
    Profile dhcp-ra:                    1
    OLT Profile DHCP Relay Agent        1
    Profile dhcpv6-ra:                  dhcpv6-ra-00    OLT Profile DHCP Relay Agent 0
    Profile dhcp-ra per VLAN 3149 [0]:
        Profile:                        1
        OLT Profile DHCP Relay Agent 1
    Profile dhcpv6-ra per VLAN:          <list is empty>
    Datapath:
        Model:                          model2
        Broadcast gem port:              4095
        Multicast gem port:              4094
    Encryption:
        Enable:                          false
        Key update interval:              1
    Unactivated timeout:                 60
    ONT authentication mode:             both
    Auto reconfigure ONT:                true
    Auto reconfigure GPON-port:          true
    Auto reconfigure OLT:                true
    PLOAM password in alarm:             false
    Auto-activation ONT:                 false
        Default template:                unassigned

```

With this configuration, for all VLANs except 3149, the DHCP Relay Agent profile 0 will be used. To apply the DHCP-RA profile settings, it is required to reconfigure the OLT chips, if in the OLT configuration it is not set the "Auto reconfigure GPON-port: true" parameter. Reconfiguration is performed by the following command.

```
LTP-X# reconfigure olt all
```

For LTP-4X:

```
LTP-X# reconfigure olt
```

## Adding and configuring ONT

It is necessary to add ONT 454C54580800F6B1 to the configuration, to tree 0 ONT ID 1 and assign all the required profiles to it to provide services.

```
View connected but not added ONT
LTP-X# show interface ont 0-7 unactivated
-----
GPON-port 0 ONT unactivated list
-----
  ##  Serial          ONT ID  GPON-port  Status      RSSI[dBm]  Version  EquipmentID  Description
   1  454C54580800F6B1  n/a       0          UNACTIVATED  n/a       n/a         n/a         n/a

Go to the configuration mode
LTP-X# configure terminal

Go to tree 0 ONT ID 1
LTP-X(config)# interface ont 0/1

Assign the required ONT to this position
LTP-X(config)(if-ont-0/1)# serial 454C54580800F6B1

Assign ports NTP-RG profile
LTP-X(config)(if-ont-0/1)# profile ports NTP-RG

Assign cross-connect INTERNET profile
LTP-X(config)(if-ont-0/1)# service 0 profile cross-connect INTERNET

Assign cross-connect VOIP profile
LTP-X(config)(if-ont-0/1)# service 1 profile cross-connect VOIP

Assign cross-connect MC_IPTV profile
LTP-X(config)(if-ont-0/1)# service 2 profile cross-connect MC_IPTV

Assign cross-connect UC_IPTV profile
LTP-X(config)(if-ont-0/1)# service 3 profile cross-connect UC_IPTV

Assign cross-connect ACS profile
LTP-X(config)(if-ont-0/1)# service 4 profile cross-connect ACS

Assign default dba profile 'dba 0' to all services used:
LTP-X(config)(if-ont-0/1)# service 0 profile dba dba-00
LTP-X(config)(if-ont-0/1)# service 1 profile dba dba-00
LTP-X(config)(if-ont-0/1)# service 2 profile dba dba-00
LTP-X(config)(if-ont-0/1)# service 3 profile dba dba-00
LTP-X(config)(if-ont-0/1)# service 4 profile dba dba-00

Apply the configuration
LTP-X(config)(if-ont-0/1)# do commit

Save the configuration
LTP-X(config)(if-ont-0/1)# do save
```

After executing the commands in section 10 of this manual, it is recommended to reset the subscriber terminal to factory configuration.

```
LTP-X# send omci restore interface ont 0/1
```

After reloading the device, it is necessary to check all services.

View a list of connected ONTs added to the configuration

```
LTP-X# show interface ont 0-7
```

online

-----

```
GPON-port 0 ONT online list
```

-----

##	Serial	ONT ID	GPON-port	Status	RSSI[dBm]	Version	EquipmentID	Description
1	454C54580800F6B1	1	0	OK	-25.38	3.22.0.1493	NTU-RG	

Total ONT count: 1

## ONT configuration template

To simplify the configuration of the same type of ONT, you can use a pre-prepared configuration template 'Template', which will subsequently be assigned to the ONT.

```

Go to the configuration mode
LTP-X# configure terminal

Create and switch to TP
template
LTP-X(config)# template TP

Assign ports profile for this
template
LTP-X(ont-template)("TP")# profile ports NTP-RG

Assign cross-connect INTERNET profile on service 0 of TP
template
LTP-X(ont-template)("TP")# service 0 profile cross-connect    INTERNET

Assign cross-connect VOIP profile on service 1 of TP template
LTP-X(ont-template)("TP")# service 1 profile cross-connect    VOIP

Assign cross-connect MC_IPTV profile on service 2 of TP template
LTP-X(ont-template)("TP")# service 2 profile cross-connect    MC_IPTV

Assign cross-connect STB profile on service 3 of TP template
LTP-X(ont-template)("TP")# service 3 profile cross-connect    UC_IPTV

Assign cross-connect ACS profile on service 4 of TP template
LTP-X(ont-template)("TP")# service 4 profile cross-connect    ACS

Assign default dba profile 'dba-00' to all services used:
LTP-X(ont-template)("TP")# service 0 profile dba dba-00
LTP-X(ont-template)("TP")# service 1 profile dba dba-00
LTP-X(ont-template)("TP")# service 2 profile dba dba-00
LTP-X(ont-template)("TP")# service 3 profile dba dba-00
LTP-X(ont-template)("TP")# service 4 profile dba dba-00

Apply the configuration
LTP-X(ont-template)("TP")# do commit

Save the configuration
LTP-X(ont-template)("TP")# do
save

Add ONT 454C54580800F6B2:

Go to the configuration mode
LTP-X# configure terminal

Go to tree 0 ONT ID
10
LTP-X(config)# interface ont 0/10

Assign the required ONT to this
position
LTP-X(config)(if-ont-0/10)# serial 454C54580800F6B2

Assign the TP template to this position
LTP-X(config)(if-ont-0/10)# template TP

Apply the configuration
LTP-X(config)(if-ont-0/10)# do commit

```

```

Save the configuration
LTP-X(config)(if-ont-0/10)# do save

```

The configuration of the ONT 454C54580800F6B2 will be similar to the configuration of the ONT 454C54580800F6B1 from Section 11, but to add ONT it is enough to execute only 2 commands. When viewing the ONT configuration by the [T] markers, it is easy to distinguish the template configuration parameters from the usual ones.

```

LTP-8X(config)(if-ont-0/10)# do show interface ont 0/10 configuration
-----
[ONT0/10] configuration
-----

Description:                                ''
Enabled:                                     true
Serial:                                     ELTX0800F6B1
Password:                                   '0000000000'
[T] Fec up:                                false
[T] Downstream broadcast:                  true
[T] Ber interval:                         none
[T] Ber update period:                    60
[T] Rf port state:                        disabled
[T] Omc error tolerant:                   false
Service [0]:
[T] Profile cross connect:                INTERNET    ONT Profile Cross Connect 1
[T] Profile dba:                          dba-00      ONT Profile DBA 0
      Custom cross connect:                disabled
      Service [1]:
[T] Profile cross connect:                VOIP        ONT Profile Cross Connect 2
[T] Profile dba:                          dba-00      ONT Profile DBA 0
      Custom cross connect:                disabled
      Service [2]:
[T] Profile cross connect:                MC_IPTV     ONT Profile Cross Connect 3
[T] Profile dba:                          dba-00      ONT Profile DBA 0
      Custom cross connect:                disabled
      Service [3]:
[T] Profile cross connect:                UC_IPTV     ONT Profile Cross Connect 4
[T] Profile dba:                          dba-00      ONT Profile DBA 0
      Custom cross connect:                disabled
      Service [4]:
[T] Profile cross connect:                ACS         ONT Profile Cross Connect 5
[T] Profile dba:                          dba-00      ONT Profile DBA 0
      Custom cross connect:                disabled
      Service [5]:
[T] Profile cross connect:                unassigned
[T] Profile dba:                          dba-00      ONT Profile DBA 0
      Custom cross connect:                disabled
[T] Profile shaping:                      shaping-00  ONT Profile Shaping 0
[T] Profile ports:                        NTP-RG     ONT Profile Ports 1
[T] Profile management:                   unassigned
[T] Profile scripting:                    unassigned
      Custom model:                        none
      Template:                           TP          ONT Template 1
LTP-8X(config)(if-ont-0/10)#

```

## Configuration of LTP for operation with the internal ACS server

LTP-4X/8X rev.B and LTP-4X/8X rev.C/rev.D equipment contains in its software a built-in ACS server that allows automatic configuration of ONTs belonging to this OLT.

```
Enable internal ACS server
LTP-X(config)# ip acs server enable

Specify the number of VLAN in which the ACS server will
operate
LTP-X(config)# ip acs server vid 4094

Enable the DHCP server to issue an IP to the
ONT
LTP-X(config)# ip dhcp server enable

Enable adding option 43 to DHCP packets
LTP-X(config)# ip dhcp server option-43

Specify a range of addresses to be issued to
customers
LTP-X(config)# ip dhcp server range "192.168.200.2" "192.168.201.254"

Apply the configuration
LTP-X(config)#do commit

Save the
configuration

LTP-X(config)#do save

Go to the SWITCH
mode
LTP-X# switch

SWITCH configuration
mode

LTP-X(switch)# configure

Set the VLAN ID to connect to
ACS
LTP-X(switch)(config)# vlan 4094

Transmit tagged to all pon
ports*
LTP-X(switch)(config-vlan)# tagged pon-port 0 - 7

Apply the configuration
LTP-X(switch)(config-vlan)# exit
LTP-X(switch)(config)#
commit
LTP-X(switch)(config)# exit
LTP-X(switch)# exit

Save the configuration
LTP-X# save

Go to the configuration
mode

LTP-X# configure terminal

Create and switch to a Cross-Connect profile for the ONT management
service
LTP-X(config)# profile cross-connect ACS
```

```
Specify service VLAN for management service
LTP-X(config-cross-connect)("ACS")# outer vid 4094
LTP-X(config-cross-connect)("ACS")# type management

Apply the configuration
LTP-X(config-cross-connect)("ACS")# do commit

Save the configuration
LTP-X(config-cross-connect)("ACS")# do save
```

*\* The command is applicable for:*

LTP-8 rev.B with HW\_revision 2v.

LTP-8 rev./rev.D with HW\_revision 1v.

For LTP-4X rev.B/LTP-4X rev.C/rev.D, the **tagged pon-port 0 – 3** command is applied.

For operation of ONT with built-in ACS, it is necessary to assign the created CC and Management profiles to this ONT in the same way as described in Section [Adding and configuring ONT](#).

## Configuration of ACS profile for ONT

```
LTP-X> acs

Switch to the ONT profile configuration mode
(acs)# profile

Add profile for ONT TEST
(acs-profiles)# add profile TEST

Switch to the TEST profile configuration mode
(acs-profiles)# profile TEST
(acs-profile-name='TEST'

Paste the profile from APPENDIX A.
(acs-profile-name='TEST')commit
(acs-profile-name='TEST')
```

For the convenience of working with ACS profiles for ONT, you can download the required profile via FTP/TFTP protocol.

### Example of profile downloading

```
LTP-8x# copy tftp://10.0.0.1/acs-config fs://acs-config
```



The downloaded configuration should be in the form of executable commands on the OLT to configure the required profile. The specified commands will be transparently and automatically transmitted to the CLI without completely deleting the configuration of the current profiles.

### File example

```
profile
add profile test1
profile test1
set property InternetGatewayDevice.LANDevice.1.WLANConfiguration.1.PreSharedKey.1.X_ELTEX_RU_UserDefinedPSK
1 nocheck
set property InternetGatewayDevice.LANDevice.1.WLANConfiguration.1.RadioEnabled 1 nocheck
```

## Adding and configuring a subscriber via ACS

```
(acs)#  
  
Switch to the subscriber configuration mode  
(acs)# user  
  
Add subscriber  
IVANOV  
  
(acs-user)# add user IVANOV  
  
Switch to the subscriber IVANOV configuration  
mode  
  
(acs-user)# user IVANOV  
  
Set the ONT serial number for subscriber  
IVANOV  
(acs-user-subscriber='IVANOV')# set pon_serial 454C54580800F6B1  
  
Set the ACS profile for subscriber IVANOV  
(acs-user-subscriber='IVANOV')# set profile TEST  
  
Set the login for PPPoE session  
(acs-user-subscriber='IVANOV')# set ppp_login test  
  
Set the password for PPPoE session  
(acs-user-subscriber='IVANOV')# set ppp_password TEST  
  
Set SIP PROXY address  
(acs-user-subscriber='IVANOV')# set sip_proxy 212.122.111.55  
  
Enable phone port 1  
(acs-user-subscriber='IVANOV')# set voice1_enable enabled  
  
Set the phone number for port 1  
(acs-user-subscriber='IVANOV')# set voice1_number 34234234  
  
Set the password for port 1 phone number  
(acs-user-subscriber='IVANOV')# set voice1_password test
```

## ONT firmware update via ACS



Ensure that the correct date and time are set on LTP-X.



```

Switch to the ACS configuration mode
LTP-X> acs

Switch to ONT firmware parameters configuration
mode

(acsf)firmware

Specify TFTP server address and firmware file
name
(acsf-firmware)copy 192.168.16.26 ntp-rg-3.22.1.14.fw.bin

View list of uploaded files
(acsf-firmware)show files

View list of update
profiles
(acsf-firmware)show list

Add update profile
(acsf-firmware)add firmware 1

Switch to profile edit
(acsf-firmware)firmware 1

View profile
configuration
(acsf-firmware_config-fw id='1')show config

Set firmware file for this profile
(acsf-firmware_config-fw id='1')set file ntp-rg-3.22.1.14.fw.bin

Add a configuration profile (corresponding to those ONTs that require firmware updates). The list of profiles
is available in the section (acsf-profile) by the command 'show list'
(acsf-firmware_config-fw id='1')add profile TEST

```

The next time the ONT contacts ACS, the firmware will update and the ONT will automatically restart.

If you have any questions, contact the ELTEX technical support service.

## Appendix A. Example of ACS profile for NTP-RG14XXG-W/NTU-RG14XXG-W

```

set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.DHCPSEnable" "1" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.DomainName" "HomeLAN" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.IPInterface.1.Enable" "1" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.IPInterface.1.
IPInterfaceAddressingType" "Static" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.IPInterface.1.IPInterfaceIPAddress"
"192.168.1.1" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.IPInterface.1.IPInterfaceSubnetMask"
"255.255.255.0" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.IPRouters" "192.168.1.1" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.MaxAddress" "192.168.1.254" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.MinAddress" "192.168.1.2" nocheck
set property "InternetGatewayDevice.LANDevice.1.LANHostConfigManagement.SubnetMask" "255.255.255.0" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.1.BridgeEnable" "TRUE" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.1.BridgeName" "brHSI" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.1.BridgeStandard" "802.1Q" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.1.VLANID" "10" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.2.BridgeEnable" "1" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.2.BridgeName" "brVoIP" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.2.BridgeStandard" "802.1Q" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.2.VLANID" "12" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.3.BridgeEnable" "1" nocheck
set property "InternetGatewayDevice.Layer2Bridging.Bridge.3.BridgeName" "brIPTV" nocheck

```

[illegible]

[illegible]

```

set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.SIP.RegistrationPeriod" "600" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.SIP.UserAgentPort" "5060" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.X_WANReferenceList" "12" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.1.AddressingType" "DHCP"
nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.1.ConnectionType"
"IP_Routed" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.1.DHCPClient.
SentDHCPOption.1.Enable" "1" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.1.DHCPClient.
SentDHCPOption.1.Tag" "60" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.1.DHCPClient.
SentDHCPOption.1.Value" "\Vk9JUF9OVFAUkc=" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.1.Enable" "1" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.1.Name" "VoIP_IpOE"
nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.2.AddressingType"
"Static" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.2.ConnectionType"
"IP_Routed" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.2.DefaultGateway"
"10.0.0.1" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.2.Enable" "1" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.2.ExternalIPAddress"
"10.10.10.10" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.2.Name" "MC_IpOE" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.2.SubnetMask" "255.0.0.0"
nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANIPConnection.2.
X_BROADCOM_COM_IGMPEnabled" "1" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANPPPConnection.1.ConnectionTrigger"
"AlwaysOn" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANPPPConnection.1.ConnectionType"
"IP_Routed" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANPPPConnection.1.Enable" "1" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANPPPConnection.1.IdleDisconnectTime"
"0" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANPPPConnection.1.Name" "HSI_PPP" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANPPPConnection.1.NATEnabled" "1" nocheck

```


## APPENDIX B. Example of setting private parameters for NTP-RG14XXG /NTP-RG14XXG-W

```

set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANPPPConnection.1.Username" "szt" nocheck
set property "InternetGatewayDevice.WANDevice.1.WANConnectionDevice.1.WANPPPConnection.1.Password" "szt" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.1.CallingFeatures.CallerIDName"
"111" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.1.DirectoryNumber" "111" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.1.Enable" "Enabled" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.1.SIP.AuthPassword" "111"
nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.1.SIP.AuthUserName" "111"
nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.2.CallingFeatures.CallerIDName"
"222" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.2.DirectoryNumber" "222" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.2.Enable" "Enabled" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.2.SIP.AuthPassword" "222"
nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.Line.2.SIP.AuthUserName" "222"
nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.SIP.OutboundProxy" "test.ru" nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.SIP.RegistrarServer" "test.ru"
nocheck
set property "InternetGatewayDevice.Services.VoiceService.1.VoiceProfile.1.SIP.UserAgentDomain" "test.ru"
nocheck

```

## APPENDIX C. RS-232 NULL-MODEM CABLE PIN DESIGNATION

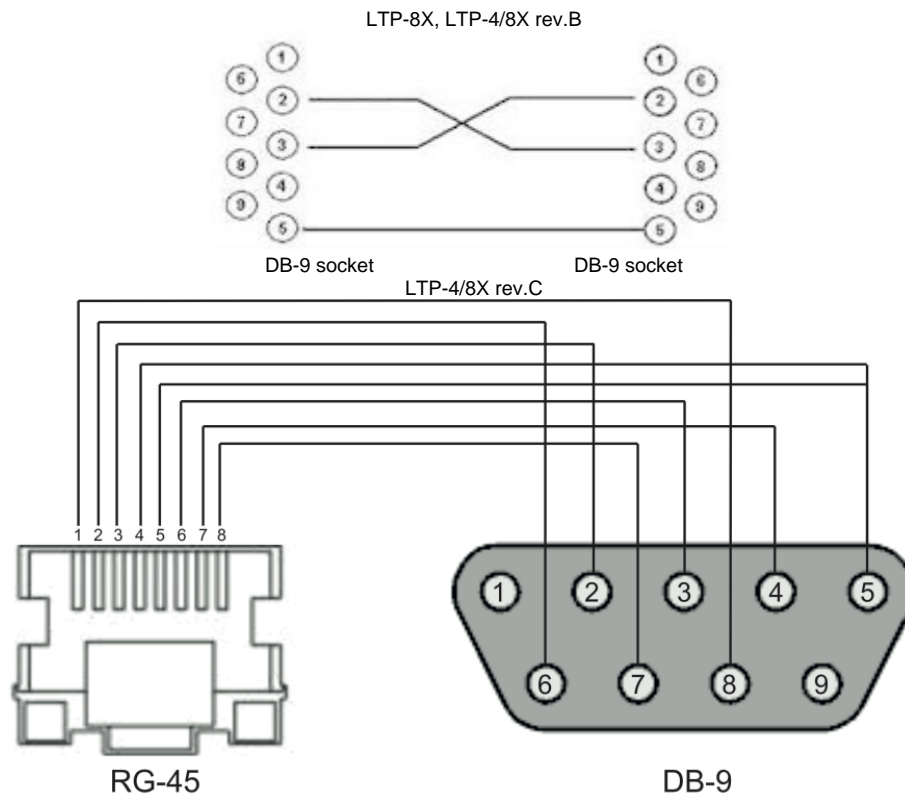

## Appendix D. ONT NTU-1 configuration

### Objective

Configure the terminal in bridge mode, data transmission to the ONT side will be carried out in VLAN 2149.

### Solution

A distinctive feature of ONT NTU-1 is its operation only in bridge mode; full configuration is performed by OLT via OMCI protocol without using an ACS server. Add the required VLAN to the LTP switch configuration.

```
Go to the SWITCH mode
LTP-X# switch

SWITCH configuration mode
LTP-X(switch)# configure

Add the required VLAN
LTP-X(switch)(config)# vlan 2149

Receive the traffic in VLAN from frontport 0
LTP-X(switch)(config-vlan)# tagged front-port 0

Transmit tagged to all pon ports*
LTP-X(switch)(config-vlan)# tagged pon-port 0 - 7
LTP-X(switch)(config-vlan)# exit

Apply the configuration
LTP-X(switch)(config)# commit
LTP-X(switch)(config)# exit
LTP-X(switch)# exit
```

*\* The command is applicable for:*

LTP-8 rev.B with HW\_revision 2v.

LTP-8 rev. with HW\_revision 1v.

For LTP-4X rev.B, the **tagged pon-port 0 – 3** command is applied.

#### Cross-connect and Ports profile configuration

```
Go to the configuration mode
LTP-X# configure terminal

Create and switch to a Cross-Connect profile for the NTU-1
LTP-X(config)# profile cross-connect NTU1

Set bridge operation mode
LTP-X(config-cross-connect)("NTU1")# bridge

Assign the given Cross-connect to bridge group 20
LTP-X(config-cross-connect)("NTU1")# bridge group 20
```

```
Specify service VLAN for the given service
LTP-X(config-cross-connect)("NTU1")# outer vid 2149
LTP-X(config-cross-connect)("NTU1")# exit

Create and switch to profile for the NTU-1
LTP-X(config)# profile ports NTU1

Add port 0 to bridge group 20
LTP-X(config-ports)("NTU1")# port 0 bridge group 20

Apply the configuration
LTP-X(config-ports)("NTU1")# do commit

Save the configuration
LTP-X(config-ports)("NTU1")# do save
```

#### Adding and configuring ONT NTU-1.

```
Go to the configuration mode
LTP-X# configure terminal

Go to tree 0 ONT ID 3
LTP-X(config)# interface ont 0/3

Assign the required ONT to this position
LTP-X(config)(if-ont-0/3)# serial 454C545862000078

Assign ports NTU-1 profile
LTP-X(config)(if-ont-0/3)# profile ports NTU1

Assign cross-connect NTU-1 profile
LTP-X(config)(if-ont-0/3)# service 0 profile cross-connect NTU1

Assign default DBA profile
LTP-X(config)(if-ont-0/3)# service 0 profile dba dba-00

Apply the configuration
LTP-X(config)(if-ont-0/3)# do commit

Save the configuration
LTP-X(config)(if-ont-0/3)# do save
```

#### Configuration example for transmitting multiple VLANs in TRUNK mode via ONT NTU-1

In the current firmware version, it is possible to transmit up to 8 VLANs in trunk mode via ONT NTU-1.

In the example, transmission of VLANs 100 and 200 will be considered.

Add the required VLAN to the LTP switch configuration.

```
Go to the SWITCH mode
LTP-X# switch

SWITCH configuration mode
LTP-X(switch)# configure
```

```
Add the required VLAN
LTP-X(switch)(config)# vlan 100,200

Receive the traffic in VLAN from frontport 0
LTP-X(switch)(config-vlan)# tagged front-port 0

Transmit tagged to all pon ports*
LTP-X(switch)(config-vlan)# tagged pon-port 0 - 7

Apply the configuration
LTP-X(switch)(config-vlan)# exit
LTP-X(switch)(config)# commit
LTP-X(switch)(config)# exit
LTP-X(switch)# exit
```

*\* The command is applicable for:*

LTP-8 rev.B with version HW\_revision 2v.

LTP-8 rev. with HW\_revision 1v.

For LTP-4X rev.B, the **tagged pon-port 0 – 3** command is applied.

Cross-connect and Ports profile configuration

```
Go to the configuration mode
LTP-X# configure terminal

Create and switch to a Cross-Connect profile for the NTU-1
LTP-X(config)# profile cross-connect NTU100

Set bridge operation mode
LTP-X(config-cross-connect)("NTU100")# bridge

Assign the given Cross-connect to bridge group 20
LTP-X(config-cross-connect)("NTU100")# bridge group 20

Specify service VLAN for the given service
LTP-X(config-cross-connect)("NTU100")# outer vid 100

Specify user VLAN for the given service
LTP-X(config-cross-connect)("NTU100")# user vid 100
LTP-X(config-cross-connect)("NTU100")# exit

Create and switch to a Cross-Connect profile for the NTU-1
LTP-X(config)# profile cross-connect NTU200

Assign the given Cross-connect to bridge group 20
LTP-X(config-cross-connect)("NTU200")# bridge group 20

Specify service VLAN for the given service
LTP-X(config-cross-connect)("NTU200")# outer vid 200

Specify user VLAN for the given service
LTP-X(config-cross-connect)("NTU200")# user vid 200
LTP-X(config-cross-connect)("NTU200")# exit
```

```
Create and switch to profile for the NTU-1
LTP-X(config)# profile ports NTU1

Add port 0 to bridge group 20
LTP-X(config-ports)("NTU1")# port 0 bridge group 20

Apply the configuration
LTP-X(config-ports)("NTU1")# do commit

Save the configuration
LTP-X(config-ports)("NTU1")# do save
```

#### Adding and configuring ONT NTU-1.

```
Go to the configuration mode
LTP-X# configure terminal

Go to tree 0 ONT ID 3
LTP-X(config)# interface ont 0/3

Assign the required ONT to this
position
LTP-X(config)(if-ont-0/3)# serial 454C545862000078

Assign ports NTU1 profile
LTP-X(config)(if-ont-0/3)# profile ports NTU1

Assign cross-connect NTU-1 profile
LTP-X(config)(if-ont-0/3)# service 0 profile cross-connect NTU100

Assign default DBA profile
LTP-X(config)(if-ont-0/3)# service 0 profile dba dba-00

Assign cross-connect NTU-1 profile
LTP-X(config)(if-ont-0/3)# service 1 profile cross-connect NTU200

Assign default DBA profile
LTP-X(config)(if-ont-0/3)# service 1 profile dba dba-00

Apply the configuration
LTP-X(config)(if-ont-0/3)# do
commit
```

## APPENDIX E. ONT SFP-ONU configuration

### Objective

Configure the terminal in bridge mode, data transmission to the ONT side will be carried out in VLAN 2149.

### Solution

A distinctive feature of ONT SFP-ONU is its operation only in bridge mode; full configuration is performed by OLT using OMCI protocol without using an ACS server.

Add the required VLAN to the LTP switch configuration.



```
Go to the SWITCH mode
LTP-X# switch

SWITCH configuration mode
LTP-X(switch)# configure

Add the required VLAN
LTP-X(switch)(config)# vlan 2149

Receive the traffic in VLAN from frontport 0
LTP-X(switch)(config-vlan)# tagged front-port 0

Transmit tagged to all pon ports*
LTP-X(switch)(config-vlan)# tagged pon-port 0 - 7
LTP-X(switch)(config-vlan)# exit

Apply the configuration
LTP-X(switch)(config)# commit
LTP-X(switch)(config)# exit
LTP-X(switch)# exit
```

*\* The command is applicable for:*

LTP-8 rev.B with version HW\_revision 2v.

LTP-8 rev. with HW\_revision 1v.

For LTP-4X rev.B, the **tagged pon-port 0 – 3** command is applied.

Cross-connect and Ports profile configuration.

```
Go to the configuration mode
LTP-X# configure terminal

Create and switch to a Cross-Connect profile for the NTU-
1
LTP-X(config)# profile cross-connect SFP

Set bridge operation mode
LTP-X(config-cross-connect)("NTU1")# bridge

Assign the given Cross-connect to bridge group 20
LTP-X(config-cross-connect)("NTU1")# bridge group 20
```

```
Specify service VLAN for the given service
LTP-X(config-cross-connect)("NTU1")# outer vid 2149
LTP-X(config-cross-connect)("NTU1")# exit

Create and switch to profile for the SFP-ONU
LTP-X(config)# profile ports SFPONU

Add port 0 to bridge group 20
LTP-X(config-ports)("NTU1")# port 0 bridge group 20

Apply the configuration
LTP-X(config-ports)("NTU1")# do commit

Save the configuration
LTP-X(config-ports)("NTU1")# do save
```

Adding and configuring ONT SFP-ONU.

```
Go to the configuration mode
LTP-X# configure terminal

Go to tree 0 ONT ID 3
LTP-X(config)# interface ont 0/3

Assign the required ONT to this position
LTP-X(config)(if-ont-0/3)# serial 454C545862000078

Assign ports SFPONU profile
LTP-X(config)(if-ont-0/3)# profile ports SFPONU

Assign cross-connect SFP-ONU profile
LTP-X(config)(if-ont-0/3)# service 0 profile cross-connect SFP

Assign default DBA profile
LTP-X(config)(if-ont-0/3)# service 0 profile dba dba-00

Apply the configuration
LTP-X(config)(if-ont-0/3)# do commit

Save the configuration
LTP-X(config)(if-ont-0/3)# do save
```

#### **Configuration example for transmitting multiple VLANs in TRUNK mode via ONT SFP-ONU**

In the current firmware version, it is possible to transmit up to 8 VLANs in trunk mode via ONT SFP-ONU.

In the example, transmission of VLANs 100 and 200 will be considered.

Add the required VLAN to the LTP switch configuration.

```
Go to the SWITCH mode
LTP-X# switch

SWITCH configuration mode
LTP-X(switch)# configure
```

```
Add the required VLAN
LTP-X(switch)(config)# vlan 100,200

Receive the traffic in VLAN from frontport 0
LTP-X(switch)(config-vlan)# tagged front-port 0

Transmit tagged to all pon ports
LTP-X(switch)(config-vlan)# tagged pon-port 0 - 7

Apply the configuration
LTP-X(switch)(config-vlan)# exit
LTP-X(switch)(config)# commit
LTP-X(switch)(config)# exit
LTP-X(switch)# exit
```

Cross-connect and Ports profile configuration.

```
Go to the configuration mode
LTP-X# configure terminal

Create and switch to a Cross-Connect profile for the SFP-ONU
LTP-X(config)# profile cross-connect SFP100

Set bridge operation mode
LTP-X(config-cross-connect)("SFP100")# bridge

Assign the given Cross-connect to bridge group 20
LTP-X(config-cross-connect)("SFP100")# bridge group 20

Specify service VLAN for the given service
LTP-X(config-cross-connect)("SFP100")# outer vid 100

Specify user VLAN for the given service
LTP-X(config-cross-connect)("SFP100")# user vid 100
LTP-X(config-cross-connect)("SFP100")# exit

Create and switch to a Cross-Connect profile for the SFP-ONU
LTP-X(config)# profile cross-connect SFP200

Assign the given Cross-connect to bridge group 20
LTP-X(config-cross-connect)("SFP200")# bridge group 20

Specify service VLAN for the given service
LTP-X(config-cross-connect)("SFP200")# outer vid 200

Specify user VLAN for the given service
LTP-X(config-cross-connect)("SFP200")# user vid 200
LTP-X(config-cross-connect)("SFP200")# exit

Create and switch to profile for the SFP-ONU
LTP-X(config)# profile ports SFPONU

Add port 0 to bridge group 20
LTP-X(config-ports)("SFPONU")# port 0 bridge group 20

Apply the configuration
LTP-X(config-ports)("SFPONU ")# do commit
```

```
Save the configuration
LTP-X(config-ports)("SFPONU ")# do save
```

Adding and configuring ONT SFP-ONU.

```

Go to the configuration mode
LTP-X# configure terminal

Go to tree 0 ONT ID 3
LTP-X(config)# interface ont 0/3

Assign the required ONT to this position
LTP-X(config)(if-ont-0/3)# serial 454C545862000078

Assign ports SFPONU profile
LTP-X(config)(if-ont-0/3)# profile ports SFPONU

Assign cross-connect SFP-ONU profile
LTP-X(config)(if-ont-0/3)# service 0 profile cross-connect SFP100

Assign default DBA profile
LTP-X(config)(if-ont-0/3)# service 0 profile dba dba-00

Assign cross-connect SFP-ONU profile
LTP-X(config)(if-ont-0/3)# service 1 profile cross-connect SFP200

Assign default DBA profile
LTP-X(config)(if-ont-0/3)# service 1 profile dba dba-00

Apply the configuration
LTP-X(config)(if-ont-0/3)# do commit

```

#### Configuration example for transmission via ONT SFP-ONU VLANs in TRUNK mode, several VLANs in Selective-tunnel mode and other VLANs in Tunnel mode

In firmware versions older than 3.26.0, it is possible to organize the trunk tunnel services through SFP-ONU.

VLAN 300 (multicast) and QinQ VLAN 1100 and 1200 (Internet) come to the uplink OLT. It is necessary to let them pass to the switch integrated in the OLT via SFP-ONU.

Consider the procedure of OLT configuration for the above diagram.

- **Step 1.** Configure the switch.

```

LTP-X(switch)(config)# vlan 300,1100,1200
LTP-X(switch)(config-vlan-range)# tagged pon-port 0
LTP-X(switch)(config-vlan-range)# front-port 0
LTP-X(switch)(config-vlan-range)# commit

```

- **Step 2.** Configure cross-connect profiles.

```

LTP-X(config)# profile cross-connect cc-tunnel
LTP-X(config-cross-connect)("cc-tunnel")# bridge
LTP-X(config-cross-connect)("cc-tunnel")# bridge group 10
LTP-X(config-cross-connect)("cc-tunnel")# tag-mode tunnel
LTP-X(config-cross-connect)("cc-tunnel")# exit
LTP-X(config)# profile cross-connect "cc-selecttunnel"
LTP-X(config-cross-connect)("cc-selecttunnel")# bridge
LTP-X(config-cross-connect)("cc-selecttunnel")# bridge group 10
LTP-X(config-cross-connect)("cc-selecttunnel")# tag-mode selective-tunnel
LTP-X(config-cross-connect)("cc-selecttunnel")# exit
LTP-X(config)# profile cross-connect "cc-single"
LTP-X(config-cross-connect)("cc-single")# bridge
LTP-X(config-cross-connect)("cc-single")# bridge group 10
LTP-X(config-cross-connect)("cc-single")# user vid 300
LTP-X(config-cross-connect)("cc-single")# exit

```

- **Step 3.** Configure ports profiles.

```
LTP-X(config)# profile ports bridge-10
LTP-X(config-ports)("bridge-10")# port 0 bridge group 10
```

- **Step 4.** Configure address-table profile by specifying the VLANs used for tunnels and assign the profile to GPON ports.

```
LTP-X(config)# profile address-table at-tunnel
LTP-X(config-address-table)("at-tunnel")# s-vlan 1100 use c-vlan
LTP-X(config-address-table)("at-tunnel")# s-vlan 1200 use c-vlan
LTP-X(config-address-table)("at-tunnel")# exit
LTP-X(config)# interface gpon-port 0
LTP-X(config)(if-gpon-0)# profile address-table at-tunnel
```

- **Step 5.** Configure SFP-ONU to be used for switch connection.

```
LTP-X(config)# interface ont 0/0
LTP-X(config)(if-ont-0/0)# serial "454C545300000001"
LTP-X(config)(if-ont-0/0)# service 0 profile cross-connect cc-tunnel dba dba-00
LTP-X(config)(if-ont-0/0)# service 1 profile cross-connect cc-selecttunnel dba dba-00
LTP-X(config)(if-ont-0/0)# service 2 profile cross-connect cc-single dba dba-00
LTP-X(config)(if-ont-0/0)# profile ports "bridge-10"
LTP-X(config)(if-ont-0/0)# service 0 custom svid 1100
LTP-X(config)(if-ont-0/0)# service 1 custom svid 1200
LTP-X(config)(if-ont-0/0)# service 1 selective-tunnel uvid 201-203
LTP-X(config)(if-ont-0/0)# service 2 custom svid 300
```

## APPENDIX F. ONT/GPON interface status table

### ONT status description

ONT status	Description
UNACTIVATED	ONT has no configurations
ALLOCATED	ONT detected
AUTHINPROGRESS	ONT authentication is in progress
AUTHFAILED	Authentication failed
AUTHOK	Authentication successfully completed
PRECONFIG	Preparing ONT for configuration
CFGINPROGRESS	ONT configuration is in progress
CFGFAILED	Configuration failed
OK	ONT is in operation
BLOCKED	ONT is blocked
MIBRESET	ONT MIB reset
FAILED	ONT has a critical failure
FWUPDATING	ONT firmware update is in progress
DISABLED	ONT is disabled (technically blocked)

### GPON interface states

Value	Description
INITED	The channel is initialised

CFGINPROGRESS	The channel configuration is in progress
CFGFAILED	The channel configuration completed with error
OK	The channel is in operation
FAILED	The channel is out of operation
DISABLED	The channel is disabled

#### TECHNICAL SUPPORT

For technical assistance in issues related to handling Eltex Ltd. equipment, please, address to Service Center of the company:

Feedback form on the website: <https://eltex-co.com/support/>

Servicedesk: <https://servicedesk.eltex-co.ru>

Visit ELTEX official website to get the relevant technical documentation and software for Eltex Ltd. equipment:

Official website: <https://eltex-co.com/>

Download center: <https://eltex-co.com/support/downloads>