


.pcap

WEB -

WEB "Maintenance" "Packet Capture" .

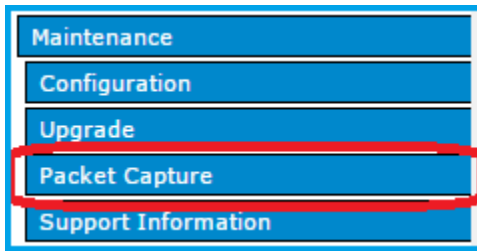

:

1. (RemotePacketCapture), Wireshark
2. () .

1 -

, .

Remote Packet Capture , (2002) *Start Remote Capture* .

Remote Packet Capture ...
Remote Capture Port (Range:1025-65530, Default: 2002)

Click "Update" to save the new settings.

() , , Wireshark 1.12.

Wireshark Capture Interfaces "Options". "Manage Interfaces" "Remote Interfaces".

"Add" IP : 2002.

.

2 -

- , .

:

- 4 3600
-

, .

Packet File Capture ...
Capture Interface
Capture Duration Seconds (range 10 to 3600)
Max Capture File Size KB (range 64 to 4096)

Click "Update" to save the new settings.

MAC (Radio):

Packet Capture Configuration ...

	Enabled	Disabled
Capture Beacons	☒	☐
Promiscuous Capture	☐	☒
Client Filter Enable	☒	
Client Filter MAC Address	d0:17:c2:0d:c6:ee WLAN client MAC address filtering applies only to radio interfaces.	

Click "Update" to save the new settings.

Update

, , *Update* *Start File Capture.*

Stop PacketCaptureStatus.

, TFTP HTTP . *Use TFTP to download the capture file* *Download.*

Packet Capture File Download ...

☐ Use TFTP to download the capture file

File download using HTTP(S) may be done by clicking the Download button.
To use TFTP download, check the box that indicates TFTP download.

TFTP Server Filename

Server IP

Download

CLI

:

- , ;
- (64 4096KB);
- (10 1);
- , (, mac);

, , :

set packet-capture file-capture-interface wlan0,

wlan0 - (eth0 - GE, radio 1 - 1, wlan1 - 0 2, wlan0vap1 - 1 1);

:

set packet-capture file-capture-max-size 4096

:

set packet-capture file-capture-duration 3600

:

set packet-capture wireless-client-filter-mode up

set packet-capture wireless-client-filter-mac 50:F5:20:44:2B:A1

:

set packet-capture start-file-capture up

:

set packet-capture stop-capture up

