


v1.20_

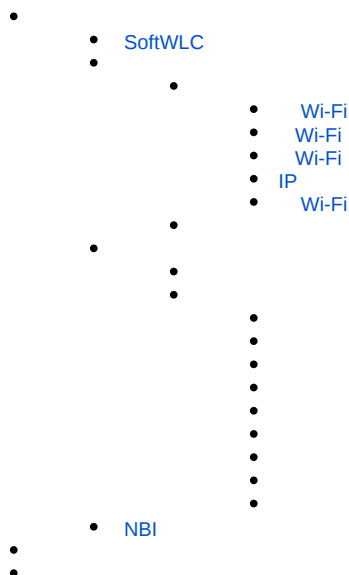

Comala Metadata License Details

Invalid commercial evaluation license with a expired error. Please click [here](https://marketplace.atlassian.com/plugins/org.andya.confluence.plugins.metadata) to purchase a commercial license.

-
-



SoftWLC

• • •

Wi-Fi	W-Fi.
Wi-Fi	Wi-Fi.
Wi-Fi	W-Fi.
IP	, IP- .

Wi-Fi	W-Fi.
-------	-------

		Wi-Fi .
	PCRF	, BRAS (PCRF).
	PCRF	, BRAS (PCRF).
Wi-Fi	Enterprise	, 'enterprise', Eltex EAP (RADIUS).
	Hotspot	, 'hotspot', Eltex, BRAS (PCRF) Eltex.Portal.
		.
	Equipment	, .
		MAC-.
		.
	Enterprise	Enterprise .
	Hotspot	Hotspot .
		.
		.
		Wi-Fi .
		, .
		.
	/	/ .
		.
		() .
		.
		.
SMS	SMS	SMS .
	SMS	SMS .
	SMS	SMS .
PCRF	L2	L2.
	PCRF	CoA BRAS.
	BRAS VRF	VRF.
	CoA log	CoA PCRF BRAS.
	MAC	MAC- .
	URL	URL BRAS.
		.
		.
		Wi-Fi .
		Wi-Fi.
	SSID	SSID.

		.
		, .
		Wi-Fi.
		.
Enterprise		, 'enterprise'.
Hotspot		, 'hotspot'.
		, 'hotspot'.
		, 'hotspot'.
		, 'hotspot'.
		.
		.
		.
	RADIUS	NAS eltex_auth_service.

- , .

.

	" " , , .
	.
	. . .
	.
	. . .
	. . .
	. . .
	. . . , , , ().
	, Wi-Fi. " " .
	, , MAC-, , , .
	, , .: SMS, , .
	.
	. . .

Доступность команд NBI

Введите название метода NBI

☐ Выбрать все

☐ AddAuthNas

☐ AddAuthRoleToAuthUser

☐ AddLocationSubnet

☒ AddOttBlack

☒ AddPCRFScript

☒ AddRadiusUserMac

☐ AddSorm2Profile

☐ AddTariffToPortal

☐ ClearAutoCreatedDomainShaper

☐ ClearDomainShaper

NBI methods	Delete
GetNbiMethodsAllowedList	
GetVersion	
AddOttBlack	
AddPCRFScript	
AddRadiusUserMac	

Сохранить

Отменить

, NBI, . NBI, " " " NBI". NBI [v1.20_NBI](#)

"Enter"!

, " NBI", . GetVersion GetNbiMethodsAllowedList .

, NBI (**GetVersion** **GetNbiMethodsAllowedList**,), , .. NBI.

– , () B2B .
 , « B2B» «», , . .
 () . , .

default_platform_admin	.	. .
default_provider	.	. , , , , Wi-Fi, . , .
default_client_admin	.	. enterprise,; ; .
default_client_marketer	.	. ,
default_client_employee	.	. , , Wi-Fi.

```
default_provided_read_only . . . , Wi-Fi, . . .
```

SoftWLC 1.8 . . . , . . .

```
'auth-roles-converter', :
```

1. , () . , (default_platform_admin).
2. 'default_client_employee', 'default_client_marketer', 'default_client_admin' . , . , .
3. , , 'default_client_admin', .
4. 'default_provider' .

```
, . . . , . tomcat7 , 'eltex-auth-service'.
```

```
sudo service tomcat7 restart
sudo service eltex-auth-service restart
```

[auth-roles-converter](#).

eltex_auth_service :

```
./auth-roles-converter -uroot -proot
```

```
, , , ,:
```

```
root@vagrant-ubuntu-trusty-64:/home/vagrant# ./auth-roles-converter -uroot -
proot
No replacement of default_provider2 with Eltex-Tab-Pcrf-Macs = 2. This role will be replaced by
default_client_admin
No replacement of providerdefault_ with Eltex-Tab-Pcrf-Macs = 2. This role will be replaced by
default_client_admin
Role client_admindefault_1 will be replaced with default_client_admin
Role client_employeedefault_ will be replaced with default_client_employee
Role client_marketerdefault_ will be replaced with default_client_marketer
Role default_client_admin2 will be replaced with default_client_admin
Role default_client_employee2 will be replaced with default_client_employee
Role default_client_marketer2 will be replaced with default_client_marketer
Role default_platform_admin2 will be replaced with default_platform_admin
Role default_provider2 will be replaced with default_client_admin
Role platform_admindefault_ will be replaced with default_platform_admin
Role providerdefault_ will be replaced with default_client_admin
Continue? [y/N] y
SQL Dump of tables: radgroupreply, radgroupcommon, radusergroup is located at /home/vagrant
/eltex_auth_service_backup.sql
Replaced role client_admindefault_1 with default_client_admin for 1 users
Replaced role client_employeedefault_ with default_client_employee for 1 users
Replaced role client_marketerdefault_ with default_client_marketer for 1 users
Replaced role default_client_admin2 with default_client_admin for 0 users
Replaced role default_client_employee2 with default_client_employee for 0 users
Replaced role default_client_marketer2 with default_client_marketer for 0 users
Replaced role default_platform_admin2 with default_platform_admin for 0 users
Replaced role default_provider2 with default_client_admin for 0 users
Replaced role platform_admindefault_ with default_platform_admin for 1 users
Replaced role providerdefault_ with default_client_admin for 1 users
root@vagrant-ubuntu-trusty-64:/home/vagrant#
```

Role client_admindefault_1 will be replaced with default_client_admin

'default_client_employee2' 'default_client_employee'.

No replacement of default_provider2 with Eltex-Tab-Pcrf-Macs = 2. This role will be replaced by default_client_admin

, 'default_provider2' 'default_client_admin'.

Continue? [y/N] y

.

SQL Dump of tables: radgroupreply, radgroupcommon, radusergroup is located at /home/vagrant/eltex_auth_service_backup.sql

.

Replaced role client_admindefault_1 with default_client_admin for 1 users

'client_admindefault_1' 'default_client_admin' . .