



ecss-copycdr

Ecss-copycdr - FTP-.
CDR- .


ecss-node-3.11 ecss-copycdr.

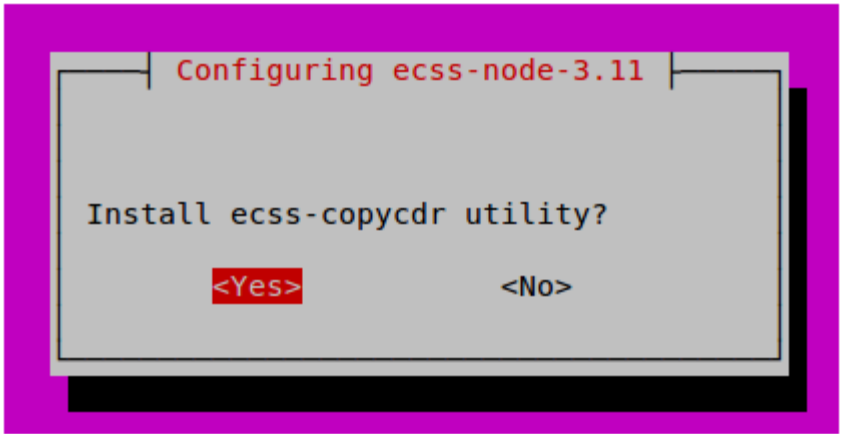


IP FTP, cdr.

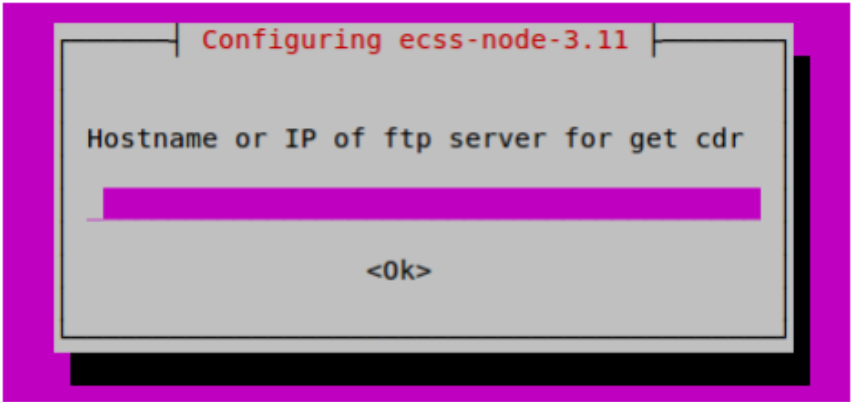


: FTP SFTP.

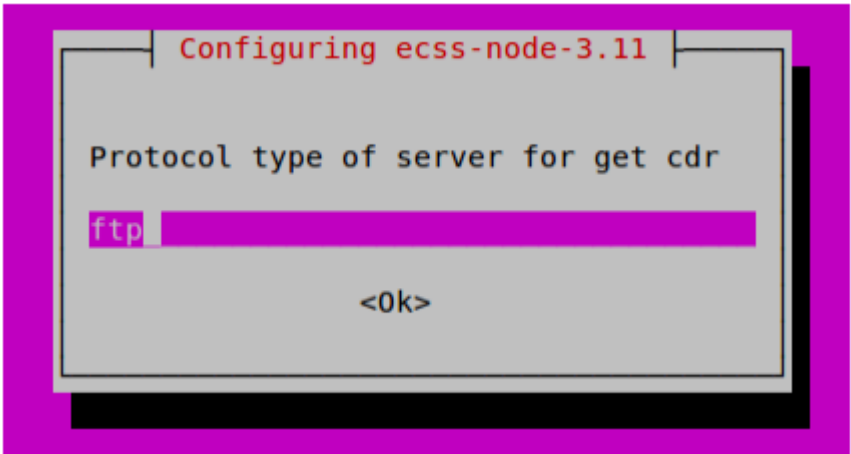


FTP-.

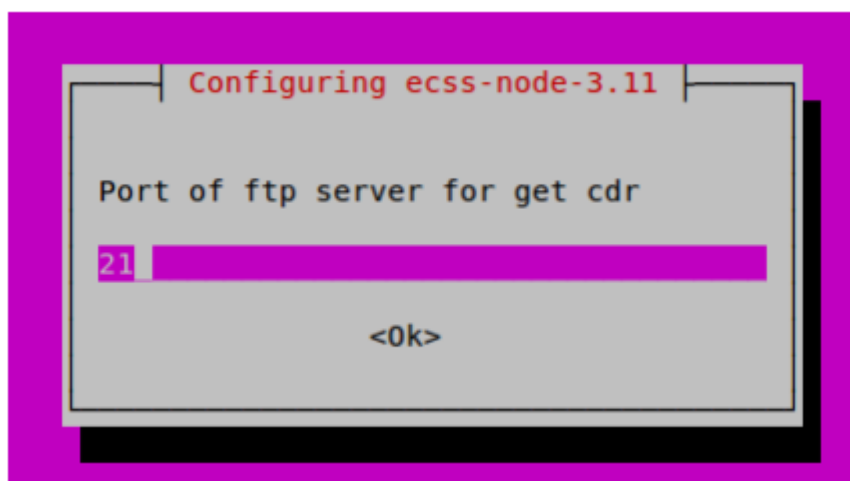

FTP-, cdr-.

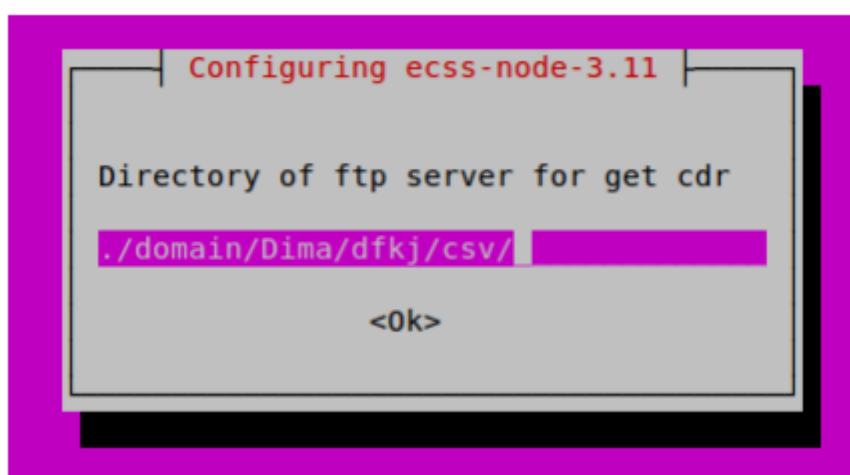

FTP-.

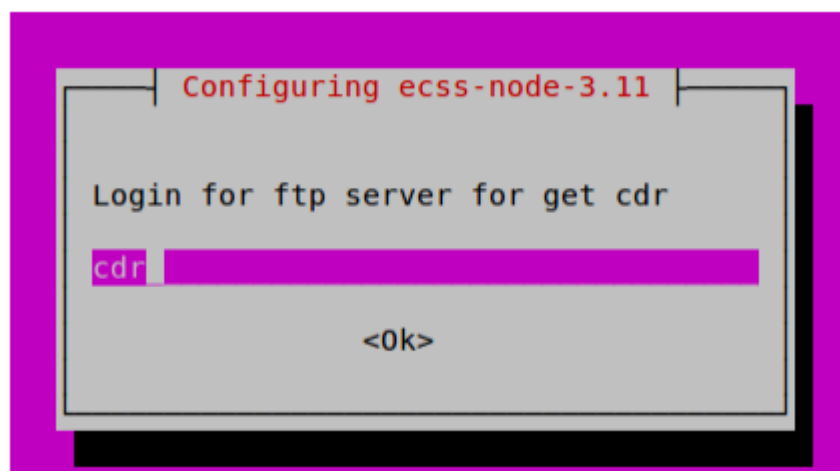

FTP-.

Configuring ecss-node-3.11

Password for ftp server for get cdr

<Ok>

IP FTP-, cdr-

Configuring ecss-node-3.11

Hostname or IP of ftp server for send cdr

192.168.118.150

<Ok>

: FTP SFTP.


Configuring ecss-node-3.11

Protocol type of server for send cdr (ftp/sftp)


ftp

<Ok>


cdr-

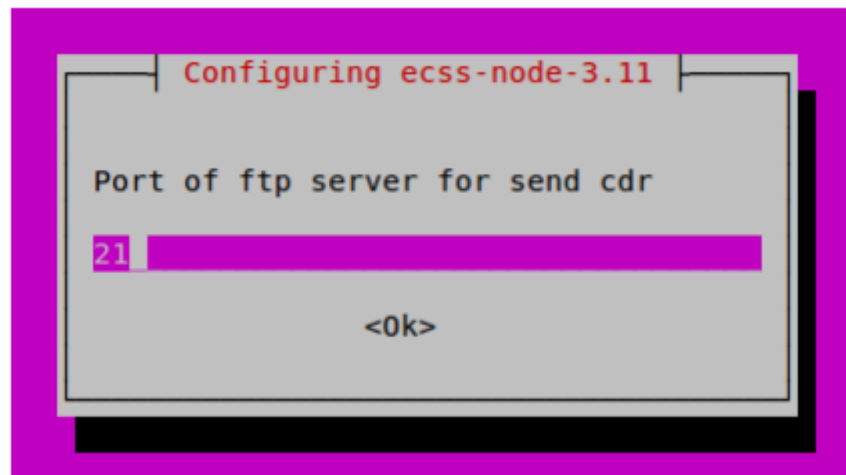


, cdr-.

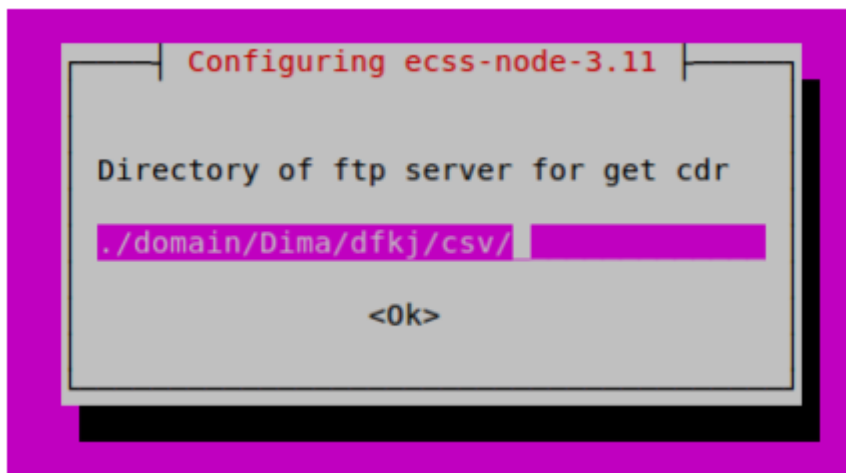

FTP- cdr-.

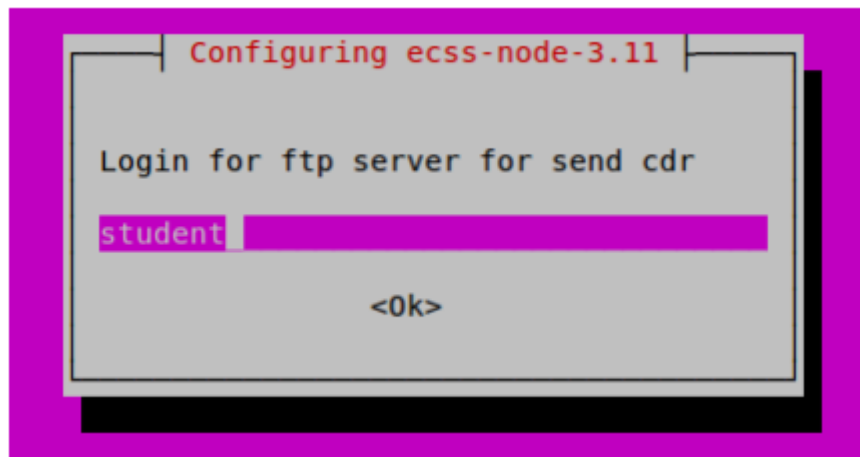

FTP- cdr-.

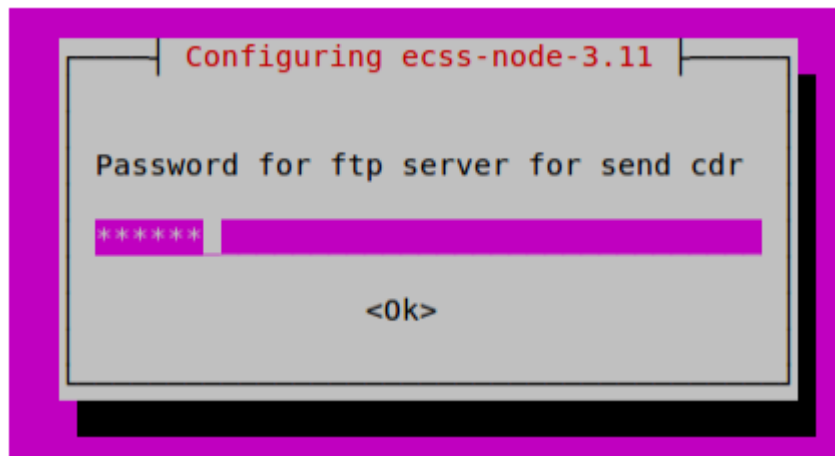

```
ecss-copycdr ecss-node-3.11 , ecss-copycdr.conf, /etc/ecss/.
```

```
FTP- , , FTP- , .
:FTP/SFTP.
```

```
, /etc/ecss/ecss-copycdr, :
```

- SLOGIN - ;
- SPASS - ;
- SPTYPE - (FTP/SFTP) ;
- SHOST - ;
- SPORT - ;
- SDIR - ;
- DLOGIN - ;
- DPASS - ;
- DPTYPE - (FTP/SFTP) ;
- DHOST - ;
- DPORT - ;
- DDIR - ;
- OPTION - .

```
( , "_transferred". ). -r, --remove .
```

```
, ( , - csv-). -e, --empty .
```

```
, .
```

```
: ecss-copycdr [] <src_host> <src_dir> <dest_host> <dest_dir>,
```

- src_host - FTP- ,
- src_dir - , ,
- dest_host - FTP- ,
- dest_dir - , .

```
c : ftp://Login:Password@Host:Port.
```

```
, : sftp://Login:Password@Host:Port.
```

```
-r, --remove .
```

```
-e, --empty .
```

```
, : ecss-copycdr []
```

```
systemd.
```

```
/lib/systemd/system/ecss-copycdr.service
```

```
/lib/systemd/system/ecss-copycdr.timer
```

```
/etc/ecss/ecss-copycdr.
```