

(ASR)



3.11.2

-
-
-
-
-
- ASR
- IVR

IVR , .

ASR ECSS-10 :

```
sudo apt-get install ecss-asr-3.11
```

ASR *ecss-asr.service*:

```
sudo systemctl start ecss-asr
```

, *systemd-resolved.service* :

```
sudo systemctl status systemd-resolved
systemd-resolved.service - Network Name Resolution
  Loaded: loaded (/lib/systemd/system/systemd-resolved.service; enabled; vendor preset: enabled)
  Drop-In: /lib/systemd/system/systemd-resolved.service.d
            resolvconf.conf
  Active: active (running) since 2025-04-23 10:09:05 +07; 30 days ago
    Docs: man:systemd-resolved.service(8)
```

systemd-resolved.service **Active: inactive**, :

```
sudo systemctl start systemd-resolved
```

ASR , . :

```
/usr/lib/ecss/ecss-asr/model/ru.dic
```

, , , ASR . JSGF:

```
/etc/ecss/ecss-asr/ivr.jsgf
```

ASR

```
cluster/storage/ds1/licence/show-licence --details 1  
...  
    Automatic Speech Recognition (ASR) subsystem enabled true  
...
```


IVR

ASR IVR. ASR , " /VR, " " " IVR " "

The screenshot shows the configuration interface for an IVR block named 'ivr_2'. The interface includes fields for 'Описание:' (Description), a list for 'Сообщения/сигналы для проигрывания:' (Messages/signals for playback), and a table for 'Список пунктов IVR меню, выбираемых абонентом:' (List of IVR menu items selected by the subscriber). The table has columns for 'Выбор абонента' (Subscriber selection), 'Описание' (Description), and 'Распознаваемые фразы' (Recognizable phrases).

Выбор абонента	Описание	Распознаваемые фразы
Добавить...		

" " " "

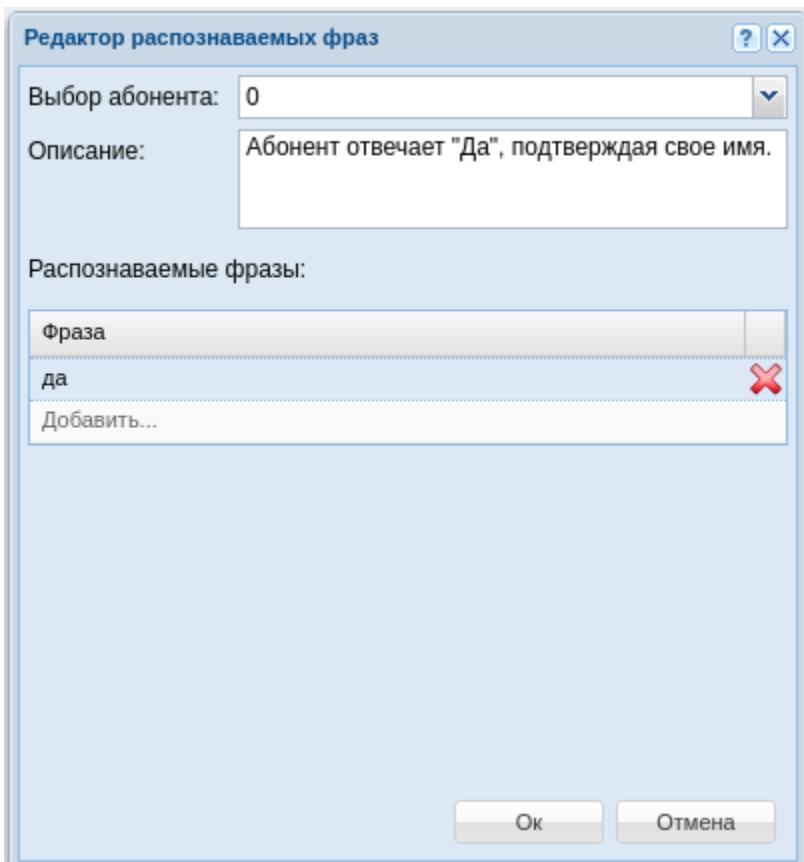

- - , .
- - .
- - , . .

i ASR MSR

ASR "" . silence-threshold MSR (silence-threshold -20).