


v1.17_

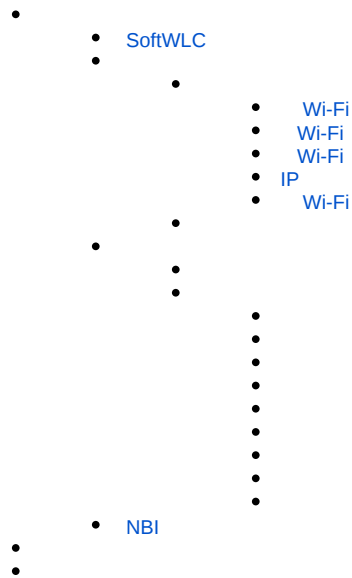

```
<div class="lui-message error lui-message-error">
<p class="title">
<span class="lui-icon icon-error"></span>
<strong>Comala Metadata License Details</strong>
</p>
<p>Invalid commercial evaluation license with a expired error. Please click <a href="https://marketplace.atlassian.com/plugins/org.andya.confluence.
plugins.metadata" target="_blank">here</a> to purchase a commercial license.</p>
</div>
```

SoftWLC

Wi-Fi	W-Fi.
Wi-Fi	Wi-Fi.
Wi-Fi	W-Fi.
IP	, IP .
Wi-Fi	W-Fi.

•



		Wi-Fi
	PCRF	, BRAS (PCRF)
	PCRF	, BRAS (PCRF)
Wi-Fi	Enterprise	, 'enterprise', Eltex EAP (RADIUS)
	Hotspot	, 'hotspot', Eltex, BRAS (PCRF) Eltex.Portal.
		.
		MAC .
	Enterprise	Enterprise
	Hotspot	Hotspot
		Wi-Fi
		, .
	/	/
		()
		.
SMS	SMS	SMS
	SMS	SMS
	SMS	SMS .
PCRF	L2	I2
	PCRF info	CoA BRAS
	CoA log	CoA PCRF BRAS
	MAC	MAC
	URL	URL BRAS
		Wi-Fi
		Wi-Fi
	SSID	SSID
		,

		Wi-Fi
Enterprise		, 'enterprise'
		, 'enterprise'
Hotspot		, 'hotspot'
		, 'hotspot'
		, 'hotspot'
		, 'hotspot'
		, 'hotspot'
		SSID
	RADIUS	NAS eltex_auth_service

, .

:



.

	" "
	, .
	. .
	. .
	. .
	... , , 0.
	, Wi-Fi. " ".
	, , MAC , , , .

	, , . : SMS, , .
	.

NBI

Доступность команд NBI

Введите название метода NBI

☐
Выбрать все

☐
AddAuthNas

☐
AddAuthRoleToAuthUser

☐
AddLocationSubnet

☒
AddOttBlack

☒
AddPCRFScript

☒
AddRadiusUserMac

☐
AddSorm2Profile

☐
AddTariffToPortal

☐
ClearAutoCreatedDomainShaper

☐
ClearDomainShaper

NBI methods	Delete
GetNbiMethodsAllowedList	
GetVersion	
AddOttBlack	
AddPCRFScript	
AddRadiusUserMac	

Сохранить

Отменить

, NBI, .
, NBI , . NBI, " " " NBI". NBI [v1.17_NBI](#)

"Enter"!

, " NBI", . GetVersion GetNbiMethodsAllowedList .

, NBI (**GetVersion** **GetNbiMethodsAllowedList**,), , .. NBI.

- , () B2B .
, « B2B» «», , . .
() . , .

default_platform_admin		. .
default_provider		. . , , , . Wi-Fi , . ,

default_client_admin	.	.	enterprise , , ,
default_client_marketer	.	.	,
default_client_employee	.	.	, , , wi-fi
provired_read_only			_ read only. , , , , . Wi-Fi , . .

SoftWLC 1.8 . , . , .

'auth-roles-converter'. :

1. , () . , (default_platform_admin). .
2. 'default_client_employee', 'default_client_marketer', 'default_client_admin'. , . , .
3. , 'default_client_admin', .
4. 'default_provider' .

, , . , , . tomcat7 , 'eltex-auth-service'.

auth-roles-converter

eltex_auth_service :

```
./auth-roles-converter -uroot -proot
```

, , , , :

```
root@vagrant-ubuntu-trusty-64:/home/vagrant# ./auth-roles-converter -uroot -
proot
No replacement of default_provider2 with Eltex-Tab-Pcrf-Macs = 2. This role will be replaced by
default_client_admin
No replacement of providerdefault_ with Eltex-Tab-Pcrf-Macs = 2. This role will be replaced by
default_client_admin
Role client_admindefault_1 will be replaced with default_client_admin
Role client_employeedefault_ will be replaced with default_client_employee
Role client_marketerdefault_ will be replaced with default_client_marketer
Role default_client_admin2 will be replaced with default_client_admin
Role default_client_employee2 will be replaced with default_client_employee
Role default_client_marketer2 will be replaced with default_client_marketer
Role default_platform_admin2 will be replaced with default_platform_admin
Role default_provider2 will be replaced with default_client_admin
Role platform_admindefault_ will be replaced with default_platform_admin
Role providerdefault_ will be replaced with default_client_admin
Continue? [y/N] y
SQL Dump of tables: radgroupreply, radgroupcommon, radusergroup is located at /home/vagrant
/eltex_auth_service_backup.sql
Replaced role client_admindefault_1 with default_client_admin for 1 users
Replaced role client_employeedefault_ with default_client_employee for 1 users
Replaced role client_marketerdefault_ with default_client_marketer for 1 users
Replaced role default_client_admin2 with default_client_admin for 0 users
Replaced role default_client_employee2 with default_client_employee for 0 users
Replaced role default_client_marketer2 with default_client_marketer for 0 users
Replaced role default_platform_admin2 with default_platform_admin for 0 users
Replaced role default_provider2 with default_client_admin for 0 users
Replaced role platform_admindefault_ with default_platform_admin for 1 users
Replaced role providerdefault_ with default_client_admin for 1 users
root@vagrant-ubuntu-trusty-64:/home/vagrant#
```

Role client_admindefault_1 will be replaced with default_client_admin

'default_client_employee2' 'default_client_employee'

No replacement of default_provider2 with Eltex-Tab-Pcrf-Macs = 2. This role will be replaced by default_client_admin

, 'default_provider2' 'default_client_admin'

Continue? [y/N] y

SQL Dump of tables: radgroupreply, radgroupcommon, radusergroup is located at /home/vagrant/eltex_auth_service_backup.sql

Replaced role client_admindefault_1 with default_client_admin for 1 users

'client_admindefault_1' 'default_client_admin' . . .